


PLL 52.600.40.2/DALI


PL 52 (1xLED 40W 840/4000K 4020lm)

— C0/C180 cd / 1000 lm - - - C90/C270

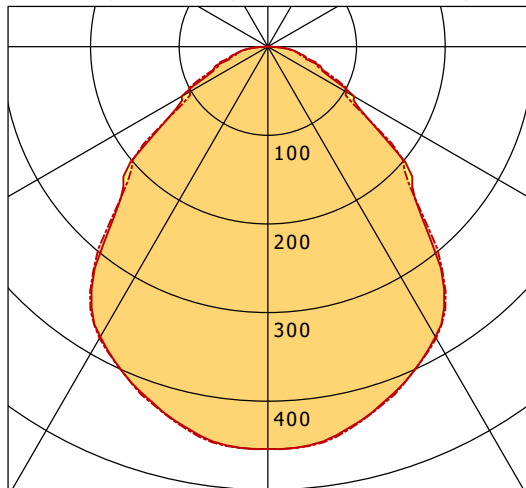

	C0	C90	C180	C270
0°	454	454	454	454
15°	432	433	432	433
30°	378	380	378	380
45°	232	229	232	229
60°	113	101	113	101
75°	45	39	45	39
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

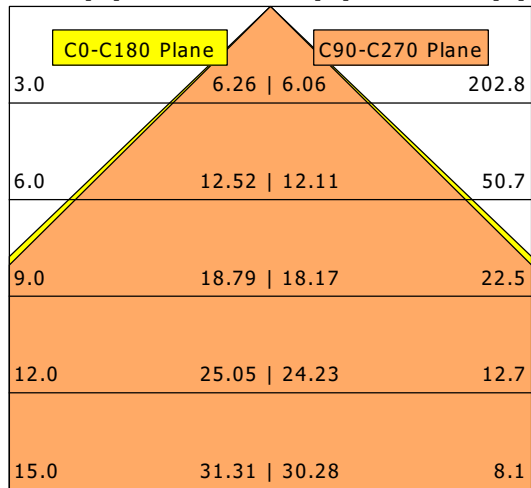

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	40 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	59 86 97 100 100
Ra/CRI	>80