

## Panel mounting socket outlet, straight - flange 107x100 fixing centers 85x77




| Product description       |                                        |
|---------------------------|----------------------------------------|
| BALS-Prd.-Nr              | 1307                                   |
| EAN                       | 4024941013079                          |
| Product category          | Panel mounting socket outlet, straight |
| Current                   | 63A                                    |
| Number of poles           | 3p                                     |
| Poles                     | 2P+PE                                  |
| Position of earth contact | 6 h                                    |
| Voltage                   | 200 up to 250V                         |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50 and 60Hz                                                                                              |
| Protection degree              | IP44                                                                                                     |
| Colour code                    | blue RAL 5015                                                                                            |
| Colour of appliance            | Hinged lid blue RAL 5015, Enclosure grey RAL 7035                                                        |
| Connection design              | screw terminal as box terminal with Kontex-contact                                                       |
| Maximum conductor size         | 25.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 114mm                                                                                                    |
| Width                          | 100mm                                                                                                    |
| Depth                          | 134mm                                                                                                    |
| Flange size vertical           | 107mm                                                                                                    |
| Flange size horizontal         | 100mm                                                                                                    |
| Drill hole distance vertical   | 85mm                                                                                                     |
| Drill hole distance horizontal | 77mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contact                        | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.415 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941013079 |
| Length         | 134 mm        |
| Width          | 100 mm        |
| Height         | 114 mm        |
| Weight         | 0.416 kg      |
| Volume         | 1,527.6 ccm   |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941953900 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 2.239 kg      |
| Volume         | 9,975 ccm     |

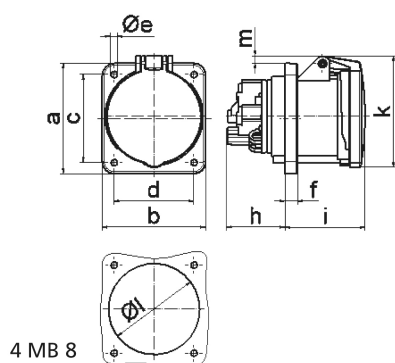

| Ampere         | 63    | 63    | 63    |  |  |  |
|----------------|-------|-------|-------|--|--|--|
| Polzahl        | 3     | 4     | 5     |  |  |  |
| a              | 107,0 | 107,0 | 107,0 |  |  |  |
| b              | 100,0 | 100,0 | 100,0 |  |  |  |
| c              | 85,0  | 85,0  | 85,0  |  |  |  |
| d              | 77,0  | 77,0  | 77,0  |  |  |  |
| e ø            | 6,5   | 6,5   | 6,5   |  |  |  |
| f              | 12,0  | 12,0  | 12,0  |  |  |  |
| h              | 56,5  | 56,5  | 56,5  |  |  |  |
| i              | 77,0  | 77,0  | 77,0  |  |  |  |
| k              | 110,0 | 110,0 | 110,0 |  |  |  |
| l ø            | 88,0  | 88,0  | 88,0  |  |  |  |
| m              | 7,0   | 7,0   | 7,0   |  |  |  |
| Leiter mm² min | 6     | 6     | 6     |  |  |  |
| Leiter mm² max | 25    | 25    | 25    |  |  |  |