


# ML-A 070.1130.08 APB


Monoline 070 Surface-Mounted & Pendant (1xLED 33W 830/3000K 3010lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

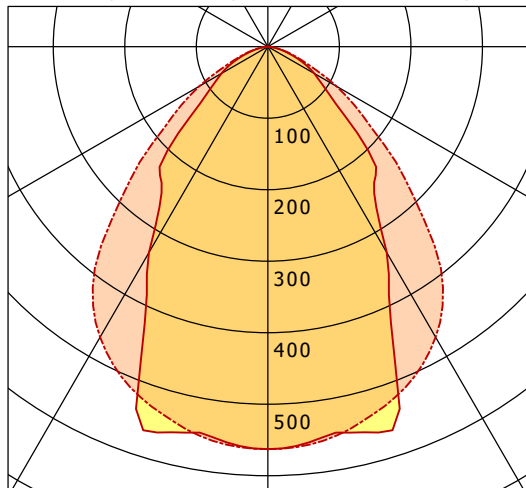

	C0	C90	C180	C270
0°	563	563	563	563
15°	558	538	558	538
30°	332	469	332	469
45°	188	281	188	281
60°	75	111	75	111
75°	23	27	23	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

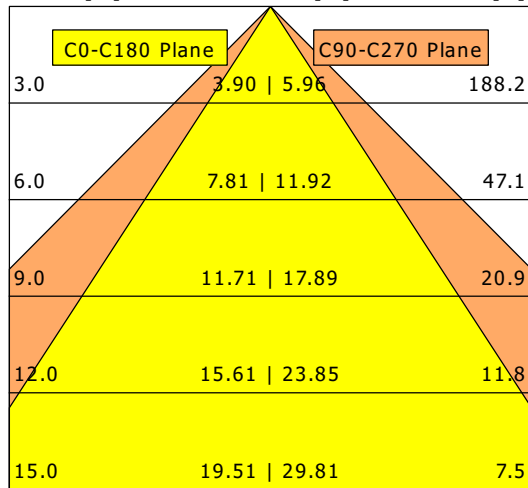

<b>η</b>	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.4
UGR C90/C270	22.6
CIE Flux Codes	67 91 99 100 100
Ra/CRI	>80