


# ML-P 060.1140.11 OPDF/DALI


Monoline 060 | Pendant (1xLED 33W 840/4000K 3980lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

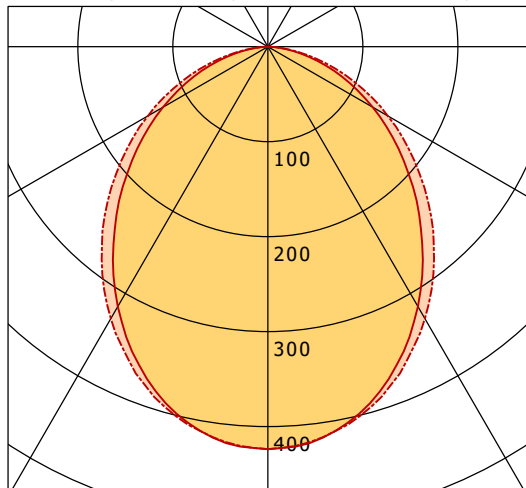

	C0	C90	C180	C270
0°	424	424	424	424
15°	394	398	394	398
30°	316	331	316	331
45°	219	241	219	241
60°	127	146	127	146
75°	49	58	49	58
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

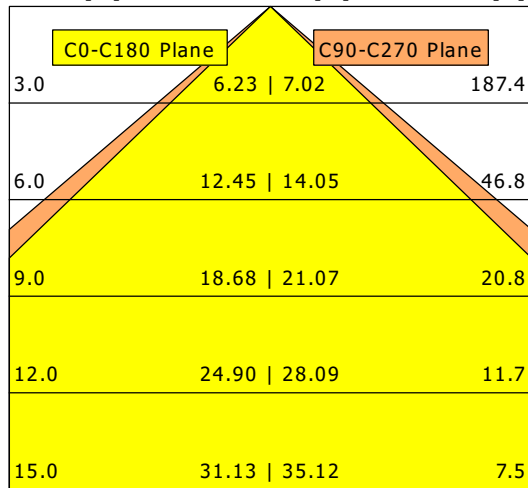

<b>η</b>	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.8
UGR C90/C270	26.5
CIE Flux Codes	52 82 97 100 100
Ra/CRI	>80