



ORYO-P 203.927.45/DALI-EU

Oryo 200 | Pendant (1xLED 28W 927/2700K 2790lm 45°)

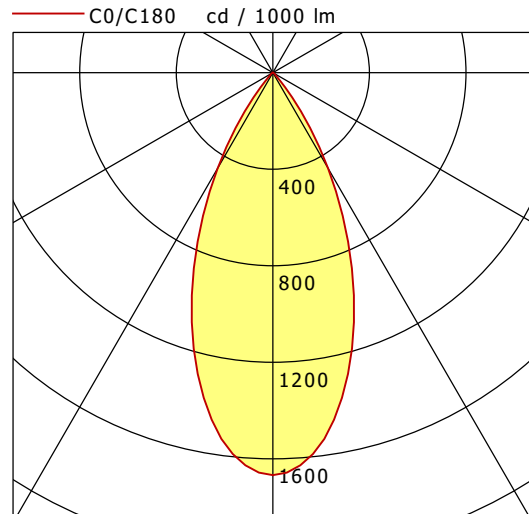

| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 1668 | 1668 | 1668 | 1668 |
| 15° | 1239 | 1239 | 1239 | 1239 |
| 30° | 457 | 457 | 457 | 457 |
| 45° | 21 | 21 | 21 | 21 |
| 60° | 6 | 6 | 6 | 6 |
| 75° | 2 | 2 | 2 | 2 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

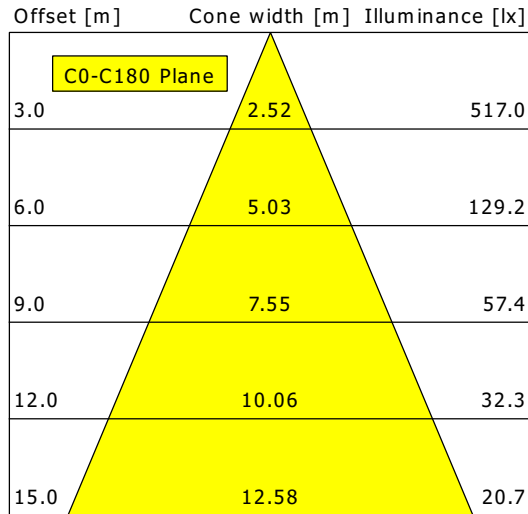

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 100 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 28 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 20.7 |
| UGR C90/C270 | 20.7 |
| CIE Flux Codes | 97 99 100 100 100 |
| Ra/CRI | >90 |