


# BIXXL 205.40.60.2

Bixxl 200 (1xLED 51W 840/4000K 5460lm 60 °)

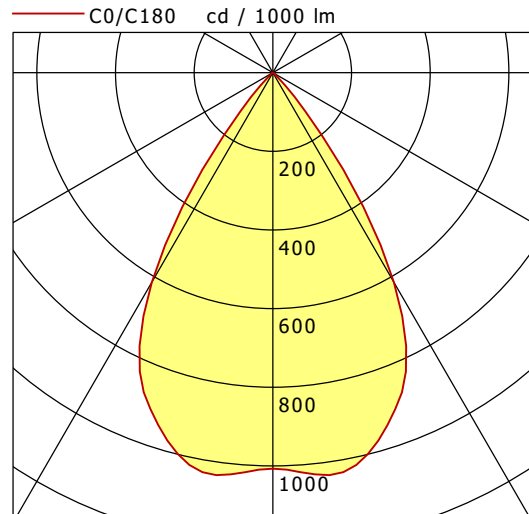

	C0	C90	C180	C270
0°	1007	1007	1007	1007
15°	987	987	987	987
30°	615	615	615	615
45°	32	32	32	32
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	3.75	611.0
6.0	7.50	152.7
9.0	11.24	67.9
12.0	14.99	38.2
15.0	18.74	24.4

<b>η</b>	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	22.7
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>80