



# BIXXL 204.40.25.2/DALI-ST

Bixxl 200 (1xLED 41W 840/4000K 4440lm 25 °)

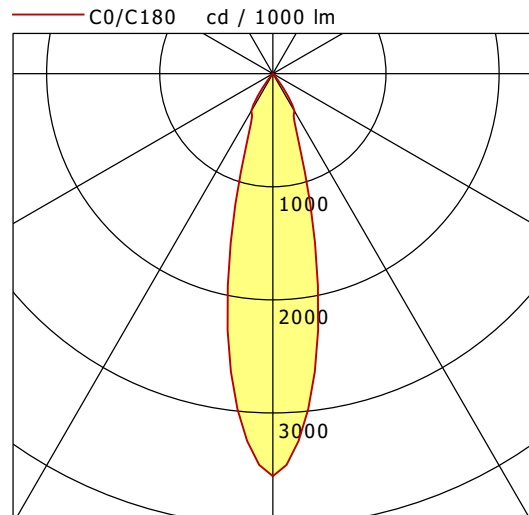

	C0	C90	C180	C270
0°	3559	3559	3559	3559
15°	1367	1367	1367	1367
30°	381	381	381	381
45°	6	6	6	6
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

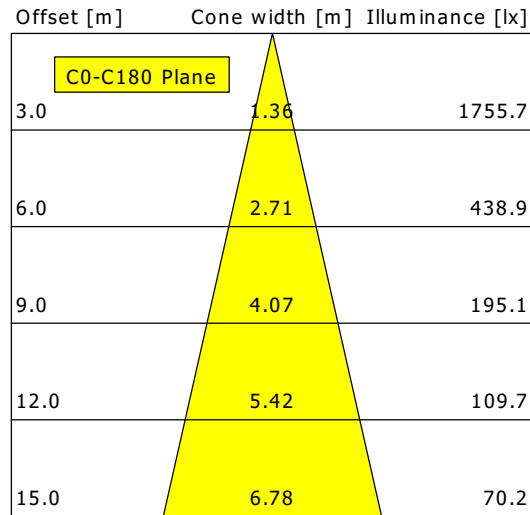

<b>η</b>	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.1
UGR C90/C270	18.1
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80