
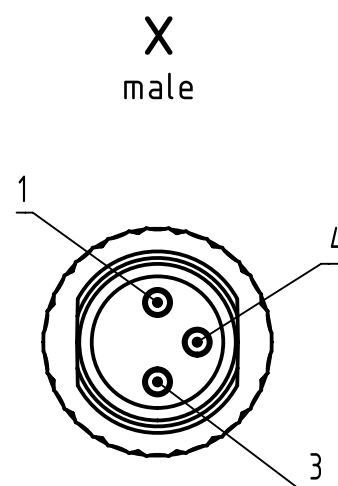
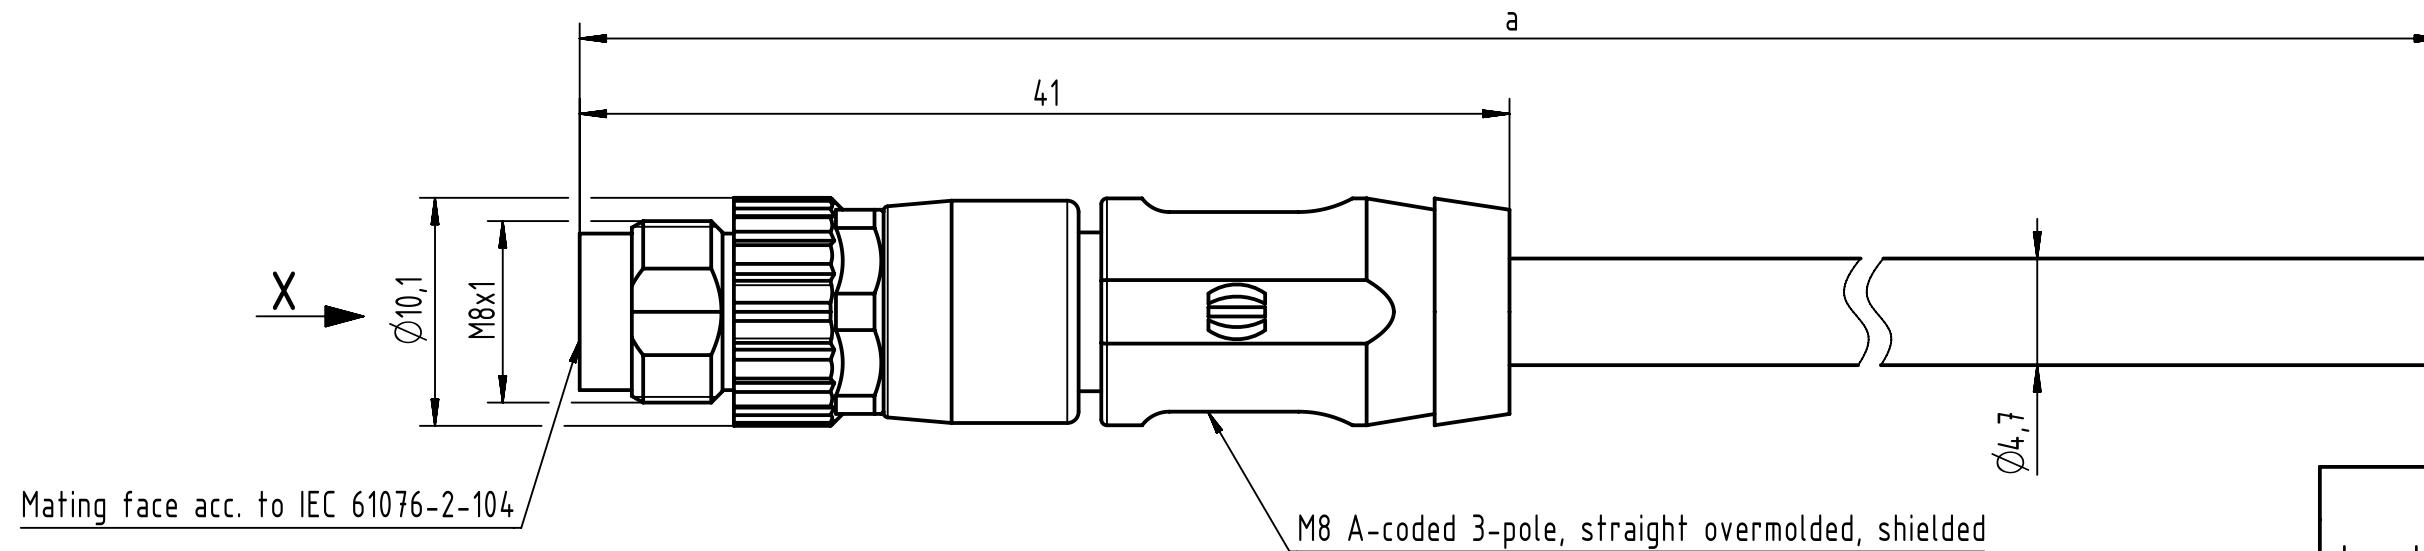
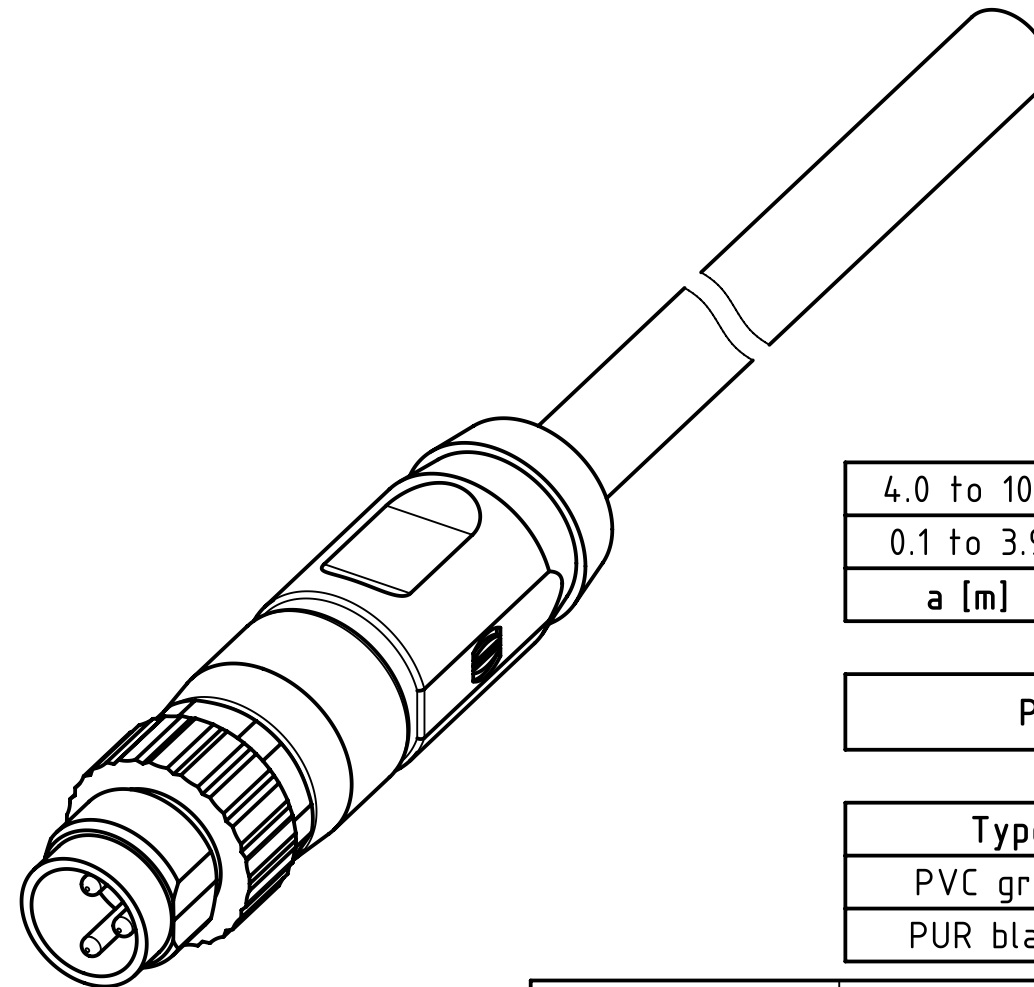


Connector Location A

Connector Location B

X
male

Loading-Plan



4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

Part no.	213473003XXXXX
----------	----------------

Type of cable	XX
PVC grey, 3x0.25mm ²	XX=35
PUR black, 3x0.25mm ²	XX=36

- Protection level: IP67
- Temperature range: -20°C...+80°C with PVC cable
-30°C...+80°C with PUR cable

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stocheci		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2018-12-17	
Department HCS - RO		Title M8 A-coded CA 3p st/- m/- shld		State Final Release		Doc-Key / ECM-Nr. 100727596/UGD/000/B 500000144934		Rev. B	
HARTING Customised Solutions		Type TB		Number 213473003XXXXX		Page 1/1			
D-32339 Espelkamp									