


# LK-L 060.10840.1125.1/DALI


Lichtkanal 060 | Light-Insert (Batwing/Wide Beam nanoOptix, 1xLED 17W 840/4000K 2760lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

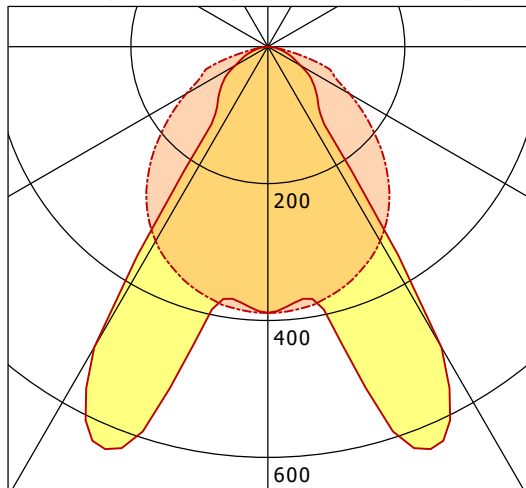

	C0	C90	C180	C270
0°	389	389	389	389
15°	482	373	482	373
30°	507	328	507	328
45°	102	243	102	243
60°	55	138	55	138
75°	21	53	21	53
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

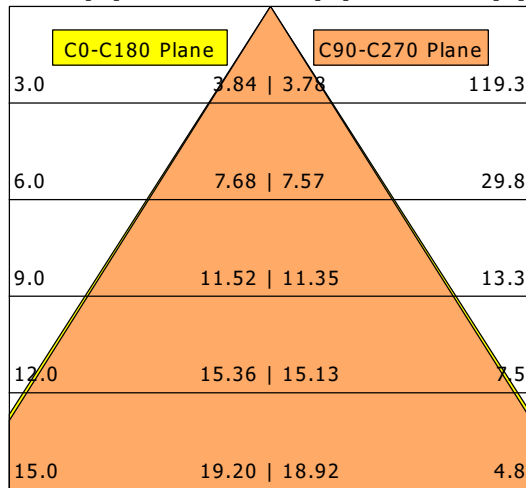

<b>η</b>	LED
Efficiency	162 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	17 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	25.6
CIE Flux Codes	64 90 98 100 100
Ra/CRI	>80