


TPSA 180.2040.11/DALI


Topas Surface-mounted (1xLED 22W 840/4000K 2070lm 65 °)

— C0/C180 cd / 1000 lm

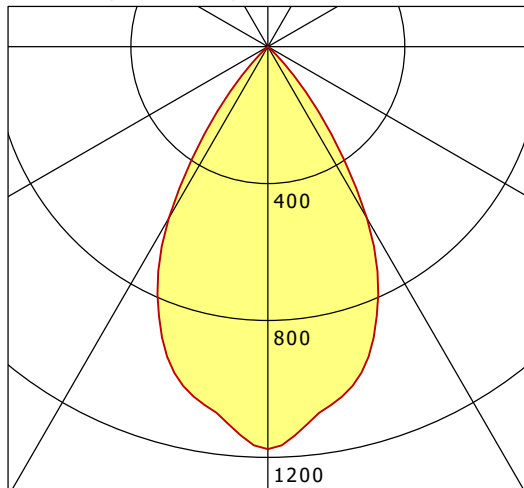

	C0	C90	C180	C270
0°	1176	1176	1176	1176
15°	1008	1008	1008	1008
30°	579	579	579	579
45°	48	48	48	48
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

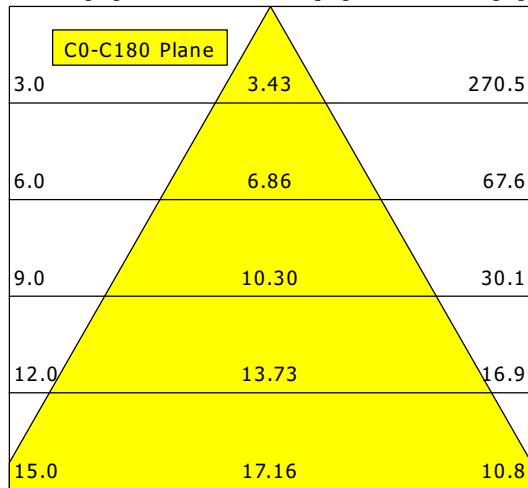

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.5
UGR C90/C270	16.5
CIE Flux Codes	97 100 100 100 100
Ra/CRI	> 80