


VTRL 13.0540.25

Vale-Tu Round Large (1xLED 12W 840/4000K 1150lm)

— C0/C180 cd / 1000 lm

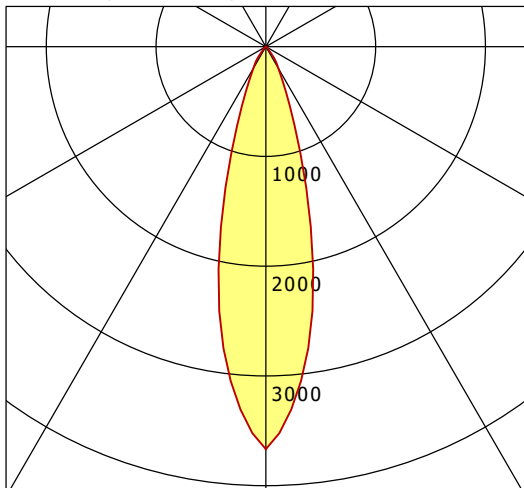

	C0	C90	C180	C270
0°	3667	3667	3667	3667
15°	1509	1509	1509	1509
30°	227	227	227	227
45°	27	27	27	27
60°	6	6	6	6
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.42	468.6
6.0	2.83	117.1
9.0	4.25	52.1
12.0	5.66	29.3
15.0	7.08	18.7

η	LED
Efficiency	96 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.9
UGR C90/C270	17.9
CIE Flux Codes	97 100 100 100 100
Ra/CRI	>80