


# FLIR 200.2027.50


Flix 200 Round (FLIRZ 200.05, 1xLED 27W 827/2700K 2740lm 50 °)

— C0/C180 cd / 1000 lm

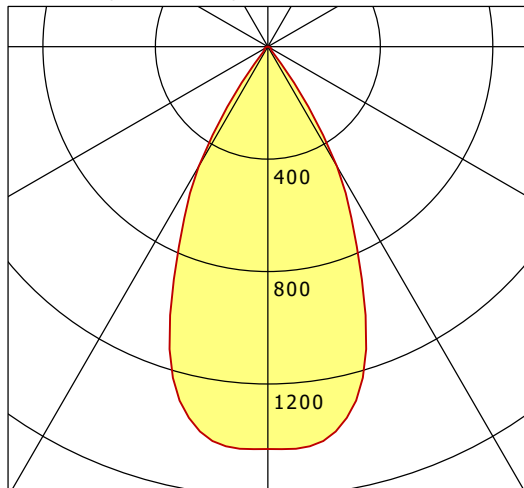

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 1431 | 1431 | 1431 | 1431 |
| 15°          | 1264 | 1264 | 1264 | 1264 |
| 30°          | 492  | 492  | 492  | 492  |
| 45°          | 17   | 17   | 17   | 17   |
| 60°          | 14   | 14   | 14   | 14   |
| 75°          | 6    | 6    | 6    | 6    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

Offset [m] Cone width [m] Illuminance [lx]

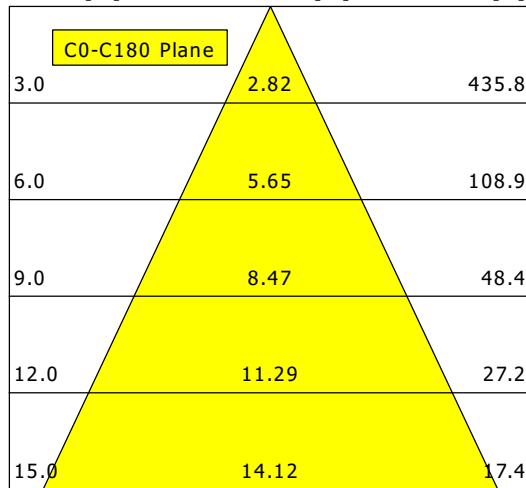

|                    |                   |
|--------------------|-------------------|
| <b>η</b>           | LED               |
| Efficiency         | 102 lm/W          |
| Direct/Indirect    | ↓ 100% / ↑ 0%     |
| System Power       | 27 W              |
| <b>UGR</b>         | X=4H, Y=8H        |
| Reflection factors | 70/50/20          |
| UGR C0/C180        | 21.2              |
| UGR C90/C270       | 21.2              |
| CIE Flux Codes     | 95 98 100 100 100 |
| Ra/CRI             | >80               |