


ML-A 060.1140.11 U19DB/DALI


Monoline 060 | Surface-Mounted | Glare Control (1xLED 33W 840/4000K 2840lm)

— C0/C180 cd / 1000 lm - - - C90/C270

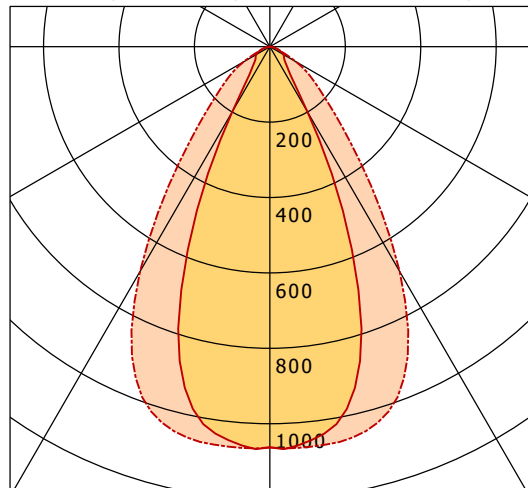

| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 1063 | 1063 | 1063 | 1063 |
| 15° | 902 | 1045 | 902 | 1045 |
| 30° | 199 | 689 | 199 | 689 |
| 45° | 58 | 231 | 58 | 231 |
| 60° | 42 | 80 | 42 | 80 |
| 75° | 19 | 11 | 19 | 11 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

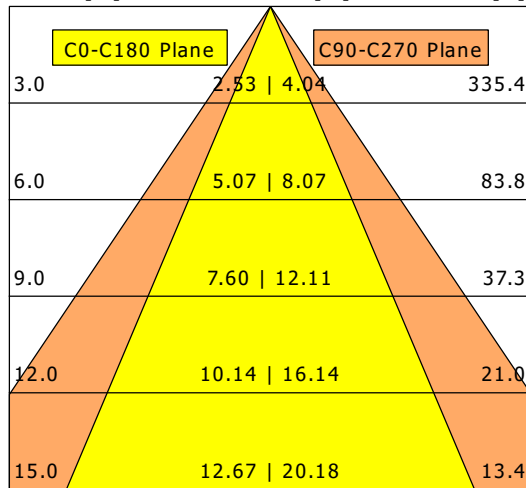

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 86 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 33 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 17.1 |
| UGR C90/C270 | 18.2 |
| CIE Flux Codes | 85 96 99 100 100 |
| Ra/CRI | >80 |