


TIBI-P 800.6840/DALI

Tibi Pendant (1xLED 59W 840/4000K 6990lm)

— C0/C180 cd / 1000 lm

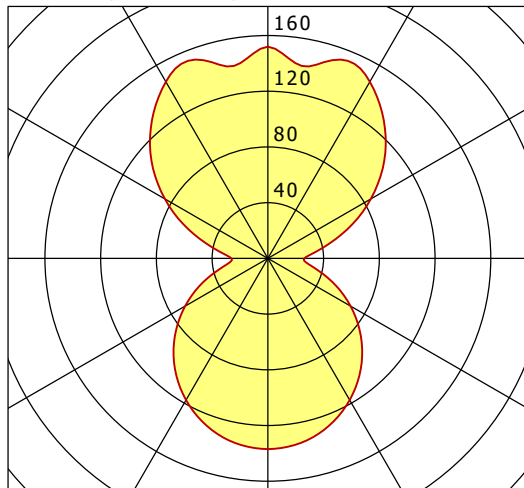

	C0	C90	C180	C270
0°	137	137	137	137
30°	117	117	117	117
60°	69	69	69	69
90°	26	26	26	26
120°	85	85	85	85
150°	146	146	146	146
180°	152	152	152	152
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	118 lm/W
Direct/Indirect	↓ 45% / ↑ 55%
System Power	59 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.1
UGR C90/C270	16.1
CIE Flux Codes	41 71 90 45 100
Ra/CRI	> 80