


LK-L 060.10840.0985.U19/DALI


Lichtkanal 060 | Light-Insert (Batwing/Wide Beam nanoOptix, 1xLED 11W 840/4000K 1630lm)

— C0/C180 cd / 1000 lm - - - C90/C270

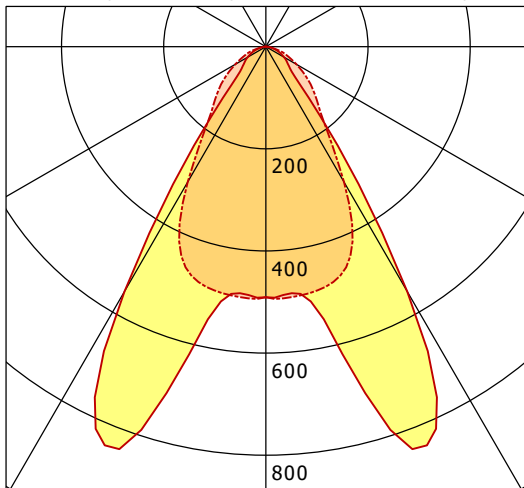

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 491 | 491 | 491 | 491 |
| 15° | 663 | 482 | 663 | 482 |
| 30° | 553 | 306 | 553 | 306 |
| 45° | 75 | 138 | 75 | 138 |
| 60° | 41 | 69 | 41 | 69 |
| 75° | 17 | 23 | 17 | 23 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

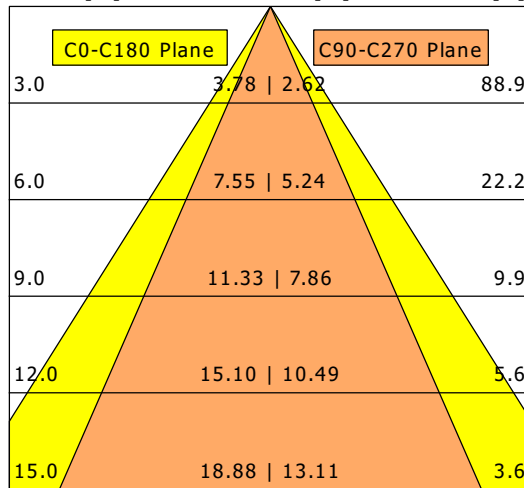

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 148 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 11 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 16.9 |
| UGR C90/C270 | 19.4 |
| CIE Flux Codes | 77 94 99 100 100 |
| Ra/CRI | >80 |