



1 2 3 4 5 6

A



B

C

D

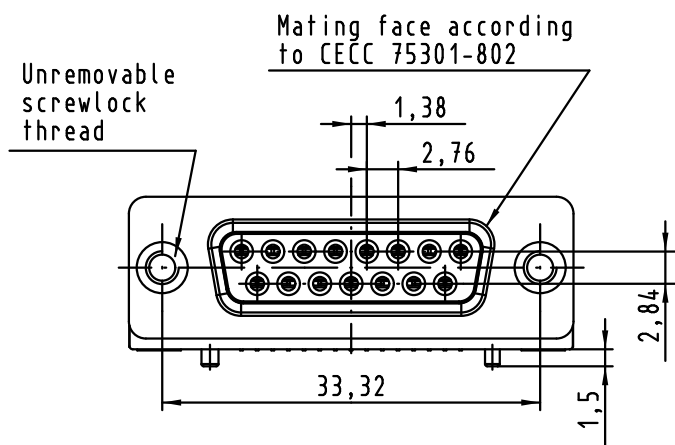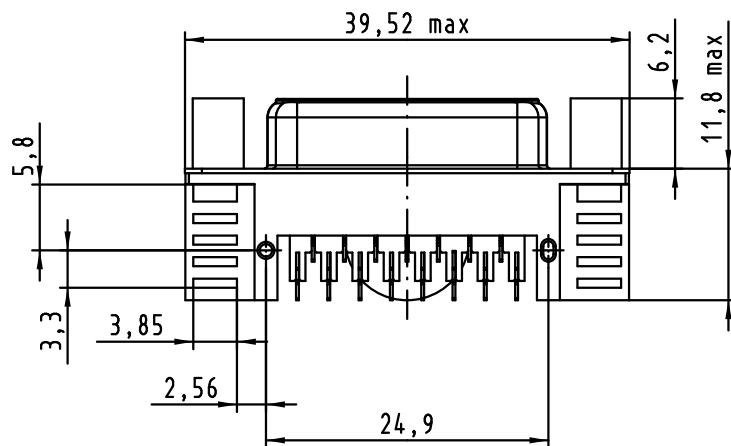

Max. Temperature: 260°C during 10 seconds

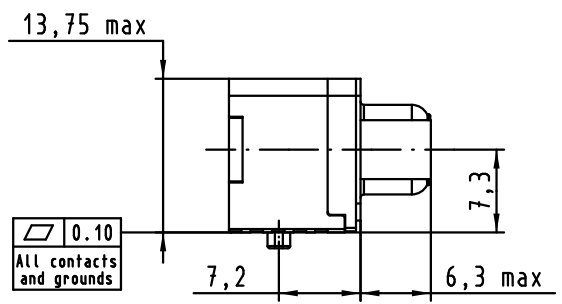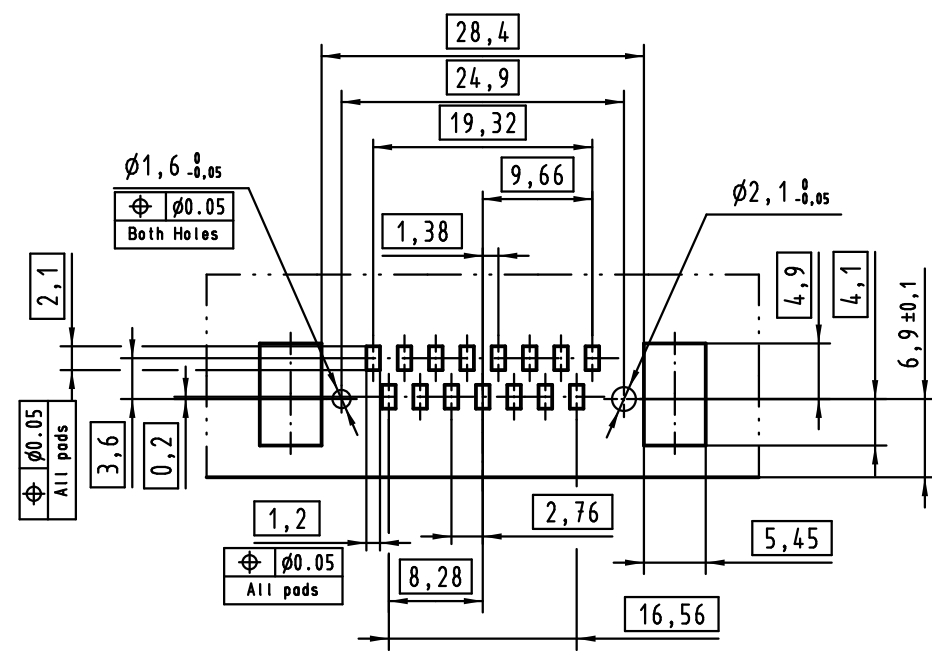

09552563622.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2/2							<p>All Dim. in mm Orig. Size DIN A 4</p>	D-SUB SMT Standard Female 15p with die casted grounds and unremovable screwlocks	Maßstab/ Scale 1,5:1		
09552566622.741	2														
09552567622.741	3														
09552563621.741	1	M3	Black Insulator	Reel Packaging (140 connectors) see page 2/2								TB 09 55 256 x62x	Blatt/ Page 1 / 2		
09552566621.741	2														
09552567621.741	3														
Part number	PL	Thread	Index designation		Mod.	Dot.	Name								

HARTING EURL  
F-95972 Paris

