




- Special features**
- Ideal for concealed mounting in ceiling coves
 - Flicker-free
 - Secured against short circuits and overloads
 - Overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	12 W
Output Voltage	12 V/DC
Output Current	0-1000 mA
Power Factor	0.90
Connection Type	Clamp
Number of Circuit Breaker B10A max.	17
Number of Circuit Breaker B16A max.	27
Number of Circuit Breaker C10A max.	36
Number of Circuit Breaker C16A max.	58
Inrush Current max.	15 A / 200 μ s
Capacitive Load	446 μ F
Reference Point T _c	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	128 mm
Width	50 mm
Height	13 mm
Product weight	68 g

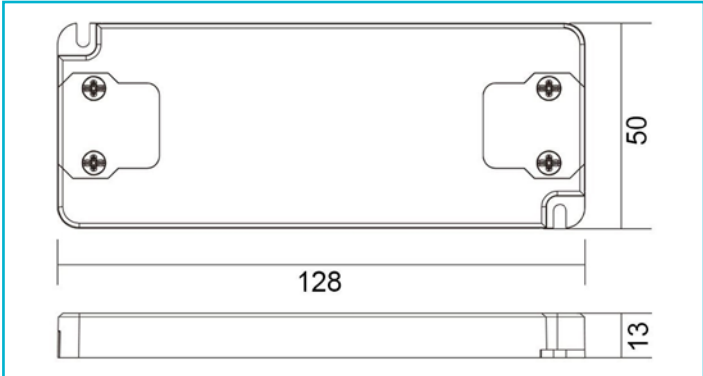