



# BTN-A 301.30.25

Button 300 Surface-Mounted (1xLED 14W 830/3000K 1400lm 35 °)

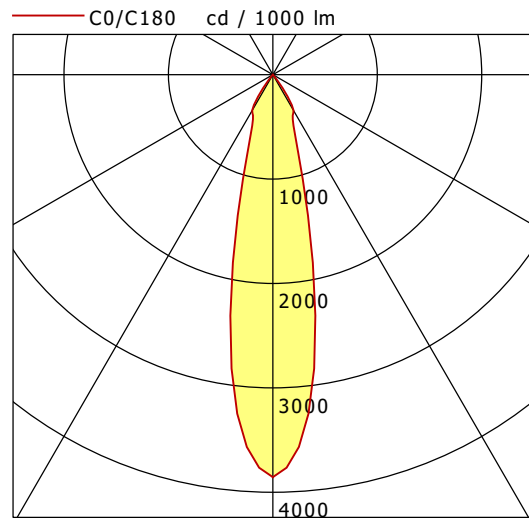

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 3855 | 3855 | 3855 | 3855 |
| 15°          | 1201 | 1201 | 1201 | 1201 |
| 30°          | 396  | 396  | 396  | 396  |
| 45°          | 11   | 11   | 11   | 11   |
| 60°          | 5    | 5    | 5    | 5    |
| 75°          | 3    | 3    | 3    | 3    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

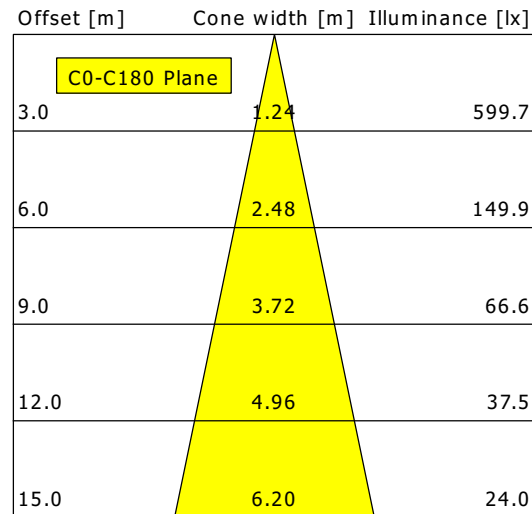

|                    |                   |
|--------------------|-------------------|
| <b>η</b>           | LED               |
| Efficiency         | 100 lm/W          |
| Direct/Indirect    | ↓ 100% / ↑ 0%     |
| System Power       | 14 W              |
| <b>UGR</b>         | X=4H, Y=8H        |
| Reflection factors | 70/50/20          |
| UGR C0/C180        | 16.9              |
| UGR C90/C270       | 16.9              |
| CIE Flux Codes     | 98 99 100 100 100 |
| Ra/CRI             | > 80              |