


# LUZ-W31 105.840.AS/DALI

LUZ | Wall (1xLED 38W 840/4000K 5390lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

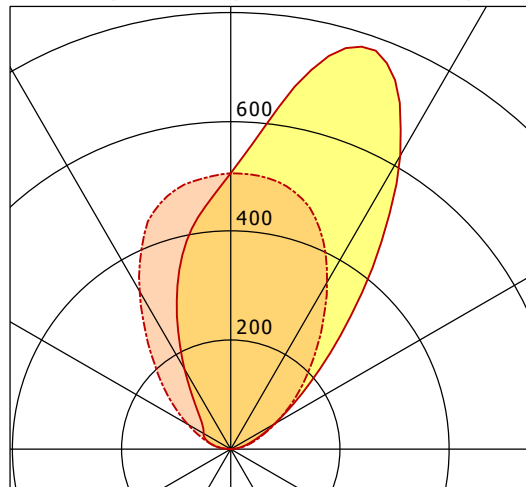

	C0	C90	C180	C270
0°	0	0	0	0
30°	0	0	0	0
60°	0	0	0	0
90°	0	0	0	1
120°	93	95	57	91
150°	621	353	170	333
180°	506	506	506	506
cd / 1000 lm				

LDC unsuitable for cone representation.  
Asymmetric LDC.

<b>η</b>	LED
Efficiency	142 lm/W
Direct/Indirect	↓ 0% / ↑ 100%
System Power	38 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	-
UGR C90/C270	-
CIE Flux Codes	0 0 0 0 100
Ra/CRI	> 80