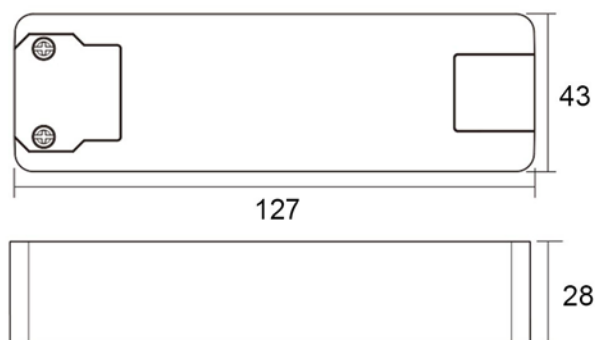


**Special features**

- Compact design
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	14.0-30 W
Output Voltage	21-43 V/DC
Output Current	700 mA
Power Factor	0.97
Connection Type	Clamp

Number of Circuit Breaker B10A max.	11
Number of Circuit Breaker B16A max.	18
Number of Circuit Breaker C10A max.	24
Number of Circuit Breaker C16A max.	39
Inrush Current max.	8 A / 300 μ s
Capacitive Load	303.45 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Life Time	30000 h
------------------	---------

Length	127 mm
Width	43 mm
Height	28 mm
Product weight	101 g

