


# ML-A 060.1040.11 U19WB/DALI


Monoline 060 | Surface-Mounted | Glare Control (1xLED 15W 840/4000K 1860lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

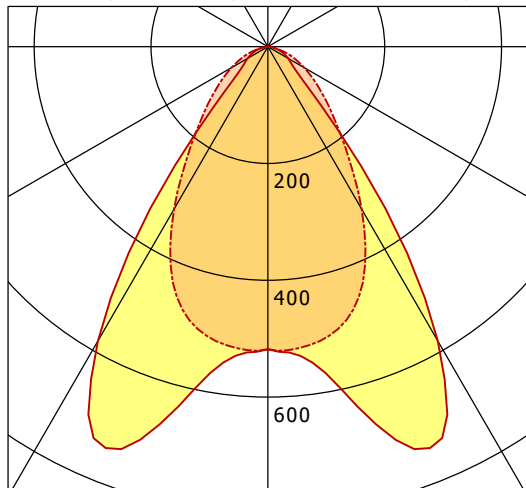

	C0	C90	C180	C270
0°	518	518	518	518
15°	654	493	654	493
30°	582	321	582	321
45°	94	151	94	151
60°	40	72	40	72
75°	17	21	17	21
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

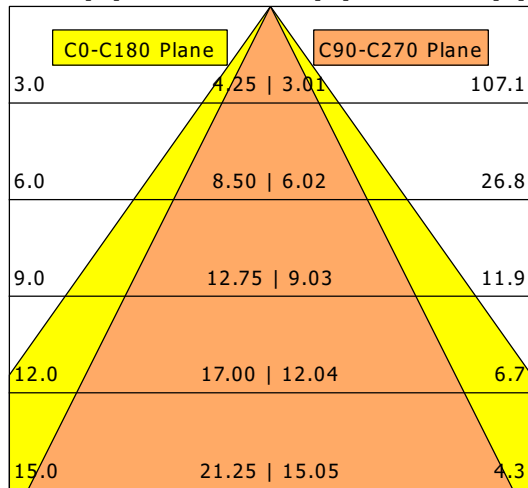

<b>η</b>	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.4
UGR C90/C270	19.0
CIE Flux Codes	76 94 99 100 100
Ra/CRI	>80