


# ML-P 060.1130.11 U19DB/DALI


Monoline 060 | Pendant | Glare Control (1xLED 33W 830/3000K 2720lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

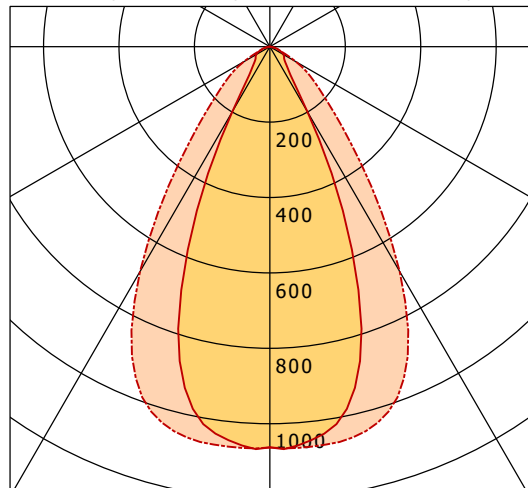

	C0	C90	C180	C270
0°	1063	1063	1063	1063
15°	902	1045	902	1045
30°	199	689	199	689
45°	58	231	58	231
60°	42	80	42	80
75°	19	11	19	11
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

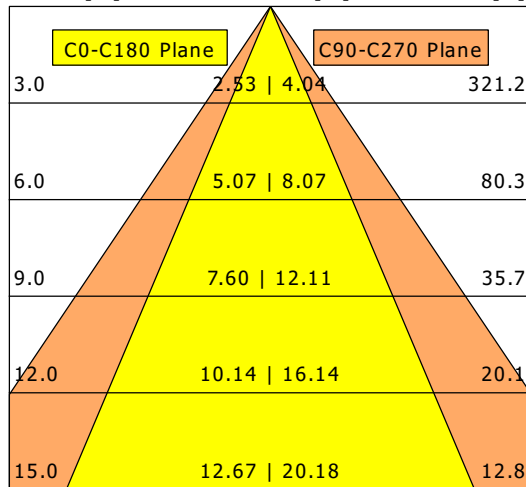

<b>η</b>	LED
Efficiency	82 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.9
UGR C90/C270	18.1
CIE Flux Codes	85 96 99 100 100
Ra/CRI	>80