lightnet

Matric-SX

Free standing luminaire - Direct/indirect light distribution

Article code: LSXLSM-830M-L1570-UA-A



Illustrations may only be similar and serve as an orientation.


Matric-SX. LED. Free standing luminaire with one luminaire head. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Satin Silver. Continuously dimmable multisensor as stand-alone-version. LxWxH (luminaire head, rectangular/Stand). L=1570mm. W=

40mm. H=2200/40mm. Medium-power current. 9631lm. 85W. 23,8kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Matric-SX

Free standing luminaire - Direct/indirect light distribution

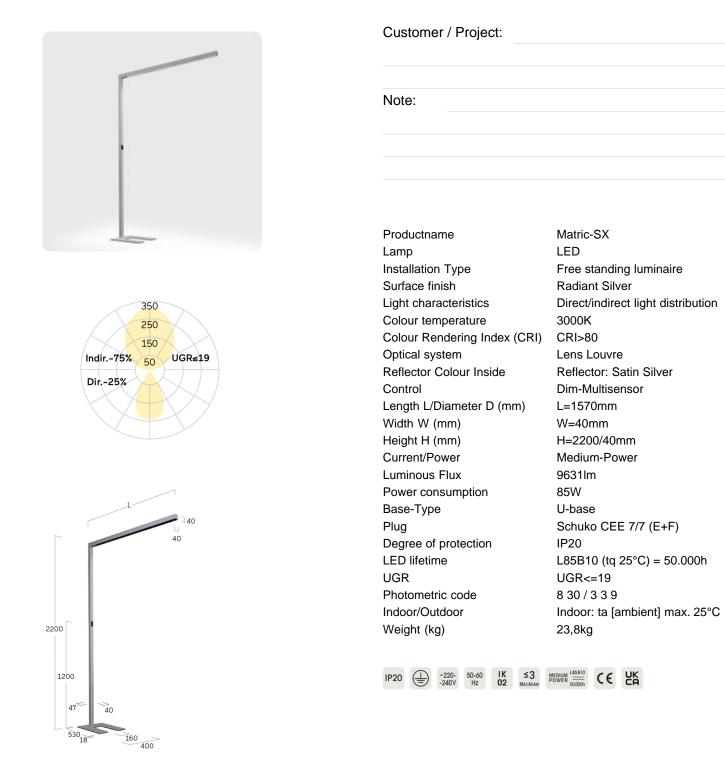

Article code: LSXLSM-830M-L1570-UA-A

Date: 19.09.2023

2/2