


**DARBEE LED wall surface mounted luminaire, IP65**  
Article no. 65253103

Light.  
For Generations.

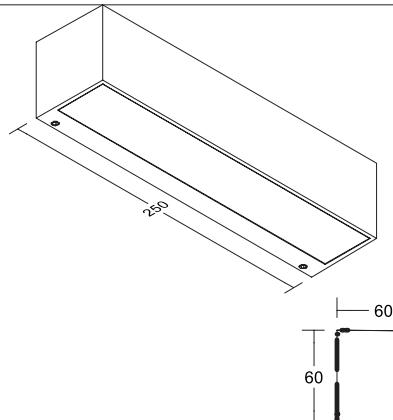

**Tender**

LED wall surface mounted luminaire, IP65, Rectangular. Ceiling cut-out Installation depth mm, Length 250 mm, Width 60 mm, Weight 9,500 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass opal cover. Luminous flux 1.200 lm, Power 2 x 18 W, System Efficiency 67 lm/W, Light colour warm white to warm white, Correlated color temprature (CCT) 3.000 - 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass / Plastic, Colour: Graphite structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, .With electronic driver, on/off switchable.

Article data	
Article no.	65253103
GTIN	4251433982517
Series name	DARBEE
Short description	LED wall surface mounted luminaire, IP65
Material	Aluminium / Glass / Plastic
Colour	Graphite
Type of surface	Structure
Shape	Rectangular
Length	250 mm
Width	60 mm
Height	60 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	9.500 kg

**DARBEE LED wall surface mounted luminaire, IP65**  
Article no. 65253103

Light.  
For Generations.

<b>Lighting technology</b>	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	1,200 lm
System efficiency	67 lm/W
McAdam-Step	McAdam-Step 6
Colour rendering	CRI > 80
Light sharing	Symmetric

<b>Operating technology of the luminaire</b>	
System output	18 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Frequenz min.	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP65
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

<b>Mounting technology</b>	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	Outdoor
Material cover	Glass opal
Suitable for through-wiring	Yes

<b>Packing data</b>	
Gross weight	11 kg
Length of packaging	270 mm
Packaging width	270 mm
Packaging height	120 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>