


MILA-P 308.1500.830/DALI

Mila | Pendant (1xLED 55W 830/3000K 8380lm)

— C0/C180 cd / 1000 lm - - - C90/C270

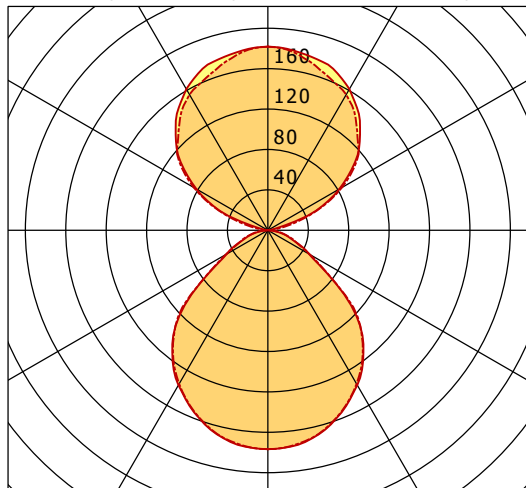

	C0	C90	C180	C270
0°	217	217	217	217
30°	177	176	177	176
60°	47	48	47	48
90°	0	1	0	1
120°	82	85	82	85
150°	161	155	161	155
180°	182	182	182	182
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	152 lm/W
Direct/Indirect	↓ 49% / ↑ 51%
System Power	55 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.1
UGR C90/C270	16.5
CIE Flux Codes	58 88 97 49 100
Ra/CRI	> 80