lightnet

Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXAEL-830H-L1765-A



Illustrations may only be similar and serve as an orientation.


Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Dimmable DALI. LxWxH (rectangular). L=1765mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface

colour. High-power current. 7377Im. 64W. 4,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

lightnet

Matric-RX

Pendant light-line - Direct/indirect light distribution

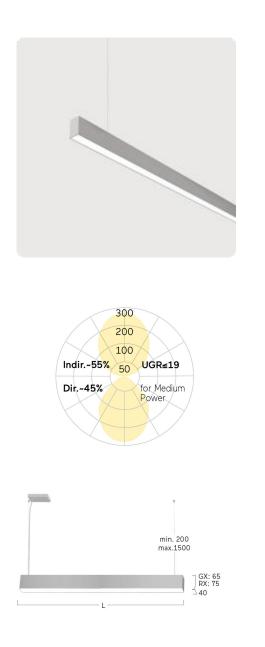

Article code: LRXAEL-830H-L1765-A

Customer	/ Project:		
Note:			

Productname Matric-RX Lamp LED Installation Type Pendant light-line Surface finish Silver Anodised Light characteristics Direct/indirect light distribution Colour temperature 3000K Colour Rendering Index (CRI) CRI>80 Optical system Microprismatic screen Control Dimmable (DALI) Length L/Diameter D (mm) L=1765mm Width W (mm) W=40mm Height H (mm) H=75mm Current/Power High-Power Luminous Flux 7377lm Power consumption 64W Suspension Single susp. (Set) Ceiling rose colour Ceiling rose: Matching luminaire`s surface colour Pendant length (mm) Pendant length max 1500mm **IP20** Degree of protection Certification Prüfzeichen: ENEC Cable Colour Power supply: transparent L80B10 (tq 25°C) = 50.000h LED lifetime 8 30 / 3 3 9 Photometric code Photobiological class RG0 (EN62471) Indoor/Outdoor Indoor: ta [ambient] max. 25°C

IP20 (720- 50-60 IK RG0 S3 LOW DOWER SOOD POWER SOOD OF CE LA CE

4,8kg

Weight (kg)