

## Ringo Star-PX

Pendant luminaire - Direct/indirect light distribution

Article code: RPXLBL-840M-D600-KB



Illustrations may only be similar and serve as an orientation.



Ringo Star-PX. LED. Pendant luminaire. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=16. Reflector: Jet Black. Dimmable DALI. DxHxW (round). D=600mm. W=40mm. H=75mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set).

Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. Medium-power current. 8030lm. 61W. 6,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

## Ringo Star-PX

Pendant luminaire - Direct/indirect light distribution

Article code: RPXLBL-840M-D600-KB

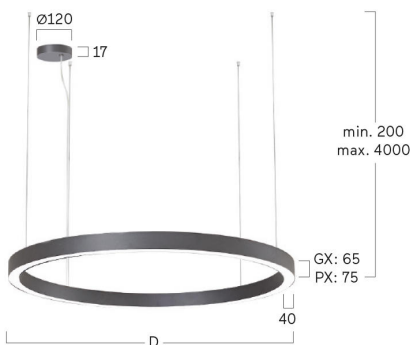

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-PX
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=600mm
Width W (mm)	W=40mm
Height H (mm)	H=75mm
Current/Power	Medium-Power
Luminous Flux	8030lm
Power consumption	61W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=16
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,1kg

