


# ML-A 070.0740.11 AOV/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 13W 840/4000K 1360lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

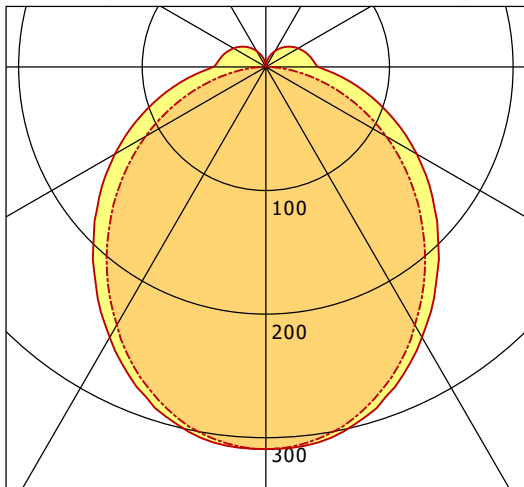

	C0	C90	C180	C270
0°	309	309	309	309
30°	253	241	253	241
60°	141	113	141	113
90°	42	3	42	3
120°	30	1	30	1
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

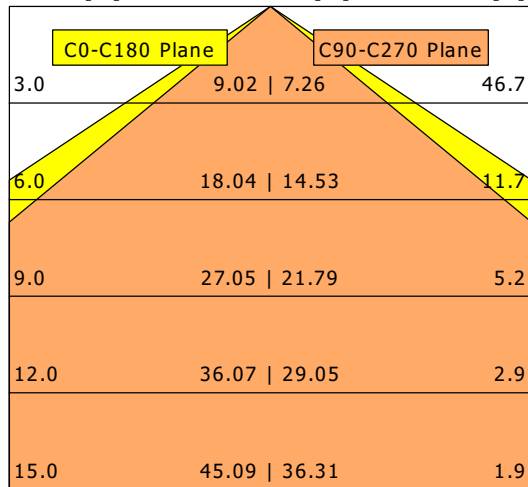

<b>η</b>	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	13 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.9
UGR C90/C270	19.7
CIE Flux Codes	45 74 92 89 100
Ra/CRI	>80