


LUZ-D13 104.840.60


LUZ | Pendant (1xLED 34W 840/4000K 5070lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

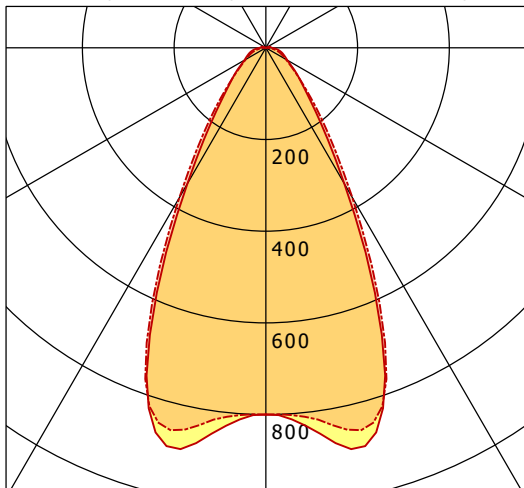

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 800 | 800 | 800 | 800 |
| 15° | 887 | 857 | 887 | 857 |
| 30° | 342 | 377 | 342 | 377 |
| 45° | 112 | 117 | 112 | 117 |
| 60° | 54 | 50 | 54 | 50 |
| 75° | 34 | 25 | 34 | 25 |
| 90° | 13 | 1 | 13 | 1 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

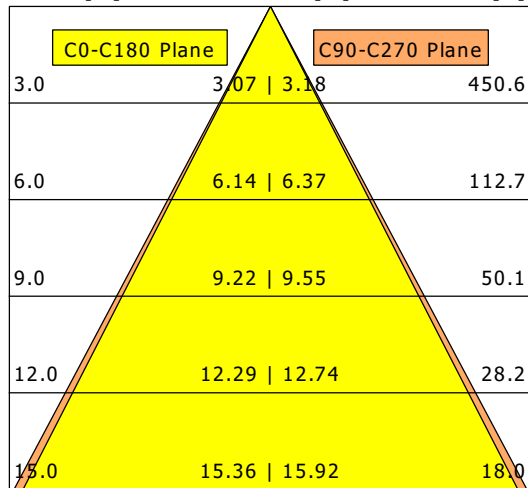

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 149 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 34 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.8 |
| UGR C90/C270 | 22.3 |
| CIE Flux Codes | 76 90 97 99 100 |
| Ra/CRI | >80 |