
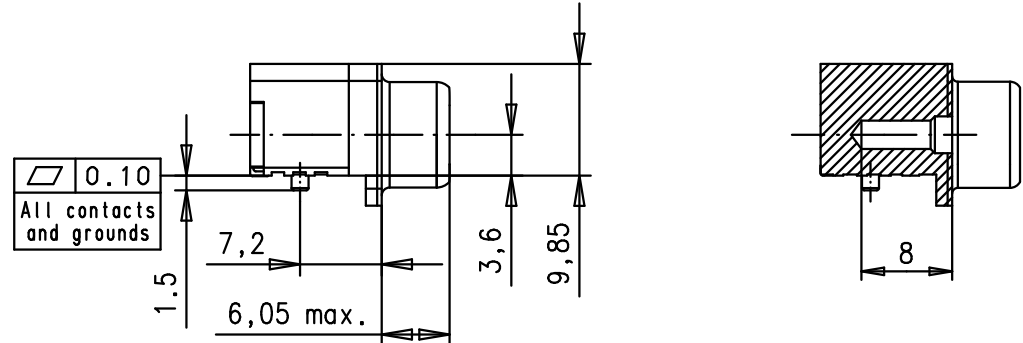



PCB Layout, component side (thickness 1.6 mm min.)

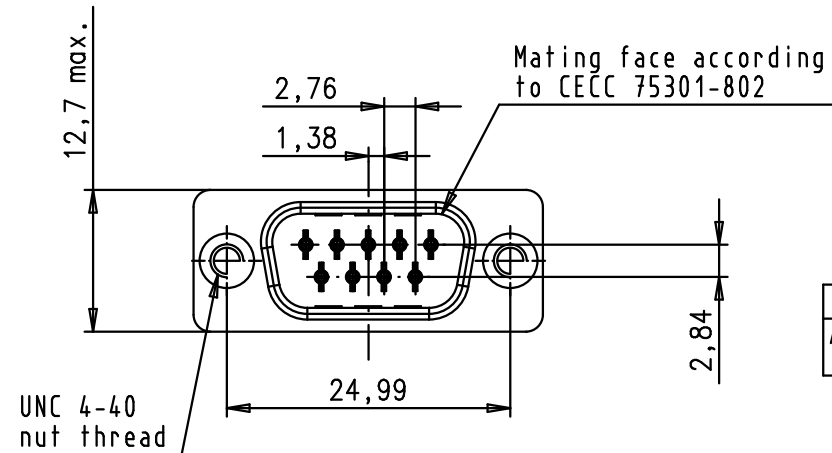

Max. Temperature : 260° during 10 seconds

09551663816.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2
09551666816.741	2			
09551667816.741	3			
Part number	PL	Thread	Index designation	


				Dat.	Name
				05Jul2007	ED
EC01215	14Jan2010	ED	Detail.		
34884	18Feb2008	LP	Insp.		
34381	17Jul2007	ED	Stand.		
34374	05Jul2007	ED			
				HARTING EURL F-95972 Paris	



D-SUB SMT  
Low Profile Male 9p  
with die casted grounds  
and 4-40 UNC nuts

TB 09 55 166 x816

Maßstab/  
Scale  
1,5:1  
Blatt/ Page  
1/2

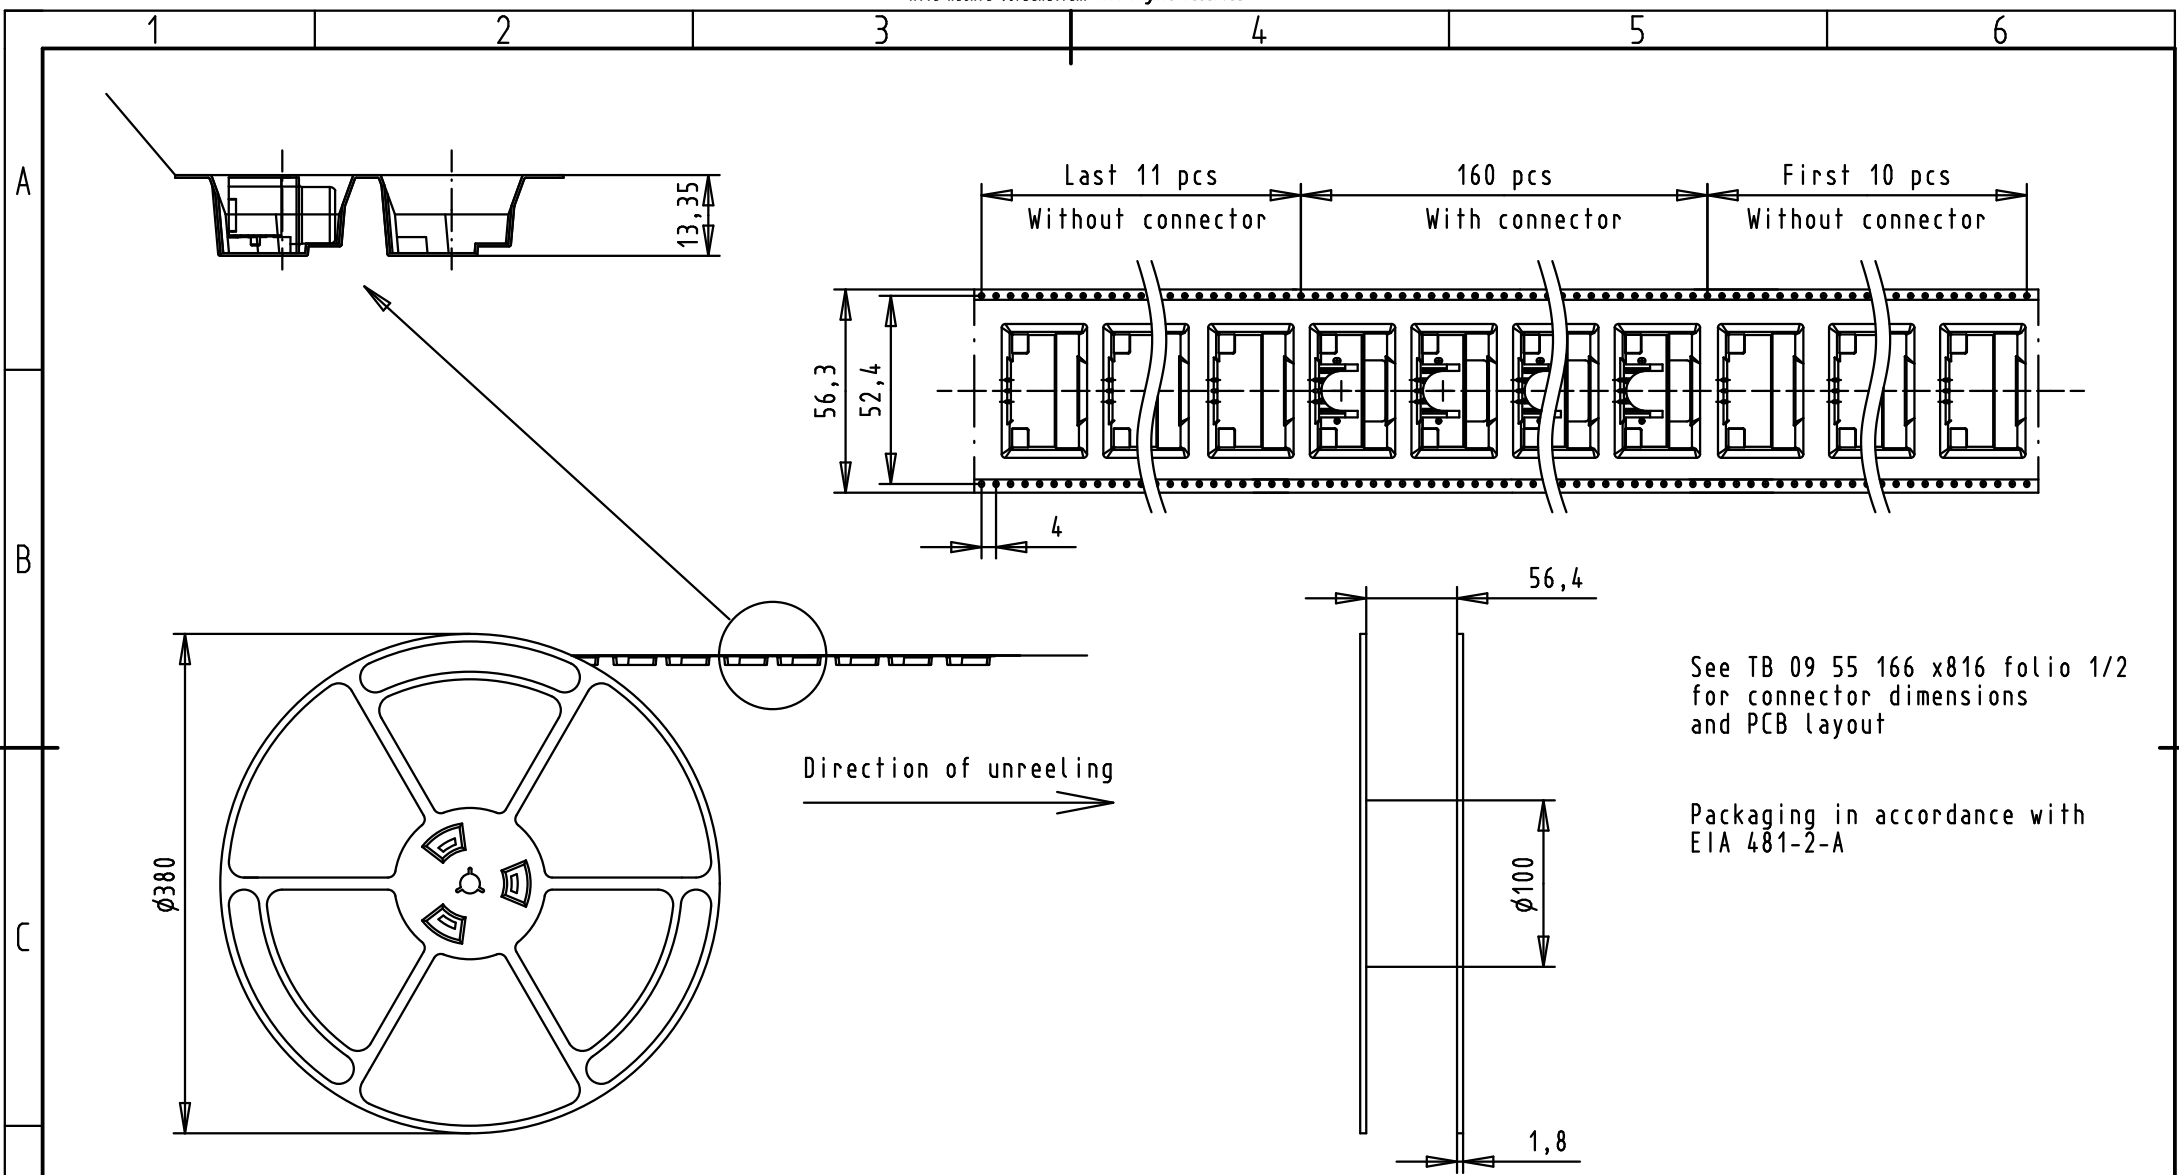

See TB 09 55 166 x816 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

Mod.	Dot.	Name	Dot.	Name
EC01215	14Jan2010	ED	Detail.	05Jul2007 ED
EC01118	26Nov2009	LP	Insp.	
34407	31Aug2007	ED	Stand.	
34375	10Jul2007	ED	HARTING EURL F-95972 Paris	
34374	05Jul2007	ED		



All Dim. in mm  
Orig. Size DIN A 4



D-SUB SMT  
Low Profile Male 9p  
with die casted grounds  
and 4-40 UNC nuts

TB 09 55 166 x816

Sub.

Maßstab/  
Scale  
  
Blatt/ Page  
2 / 2

Part number	PL	Thread	Index designation
09551663816.741	1	4-40 UNC	Black Insulator Reel Packaging (160 connectors)
09551666816.741	2		
09551667816.741	3		