



## CUBIC NEO A9 | SURFACE Q300 - Q400


### 1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

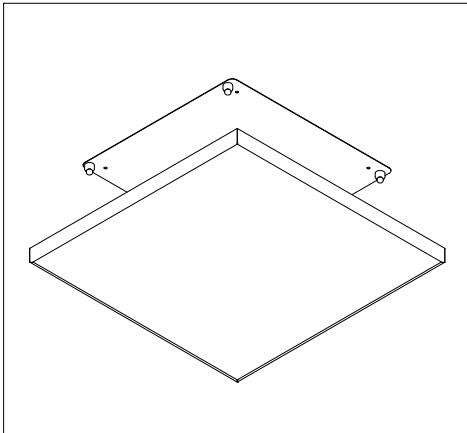


1. Bei allen Montagearbeiten Handschuhe tragen.  
 Use gloves when handling the fixture.

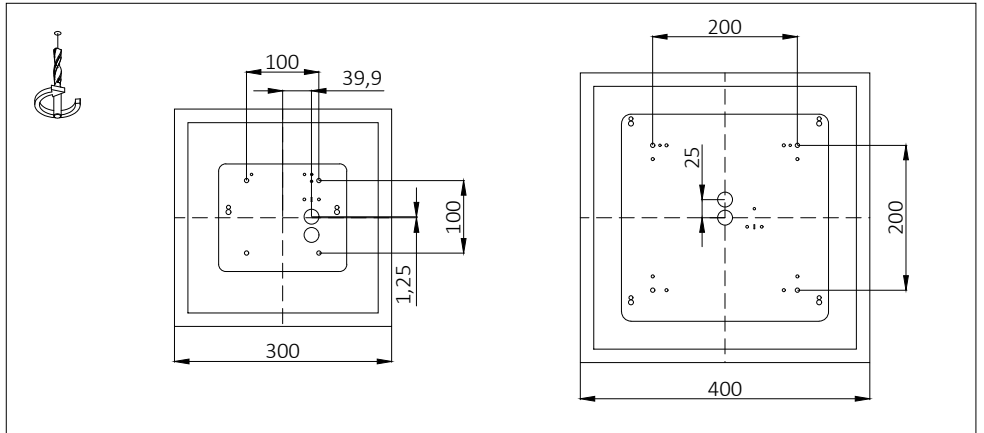


2. Montageöffnungen.  
 Installation openings.

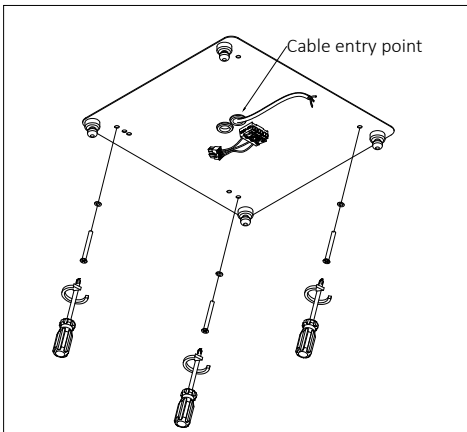


3. - min/max stripped wire length: 7mm-10mm  
 - max power supply cable: 1,5mm<sup>2</sup>

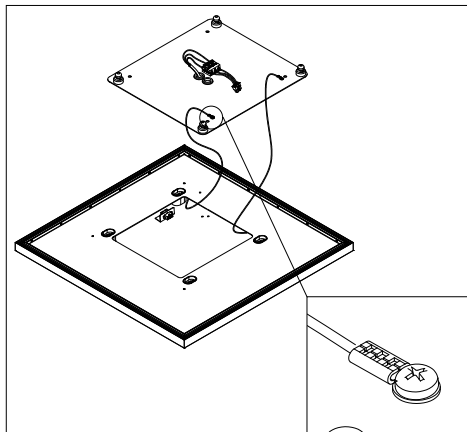


5.

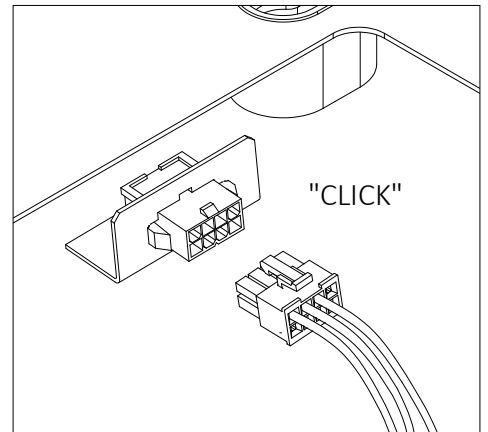


6.

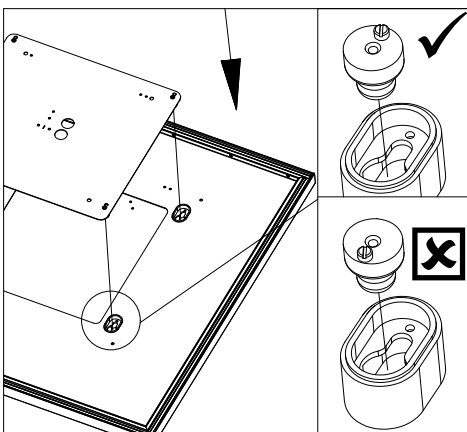

7.

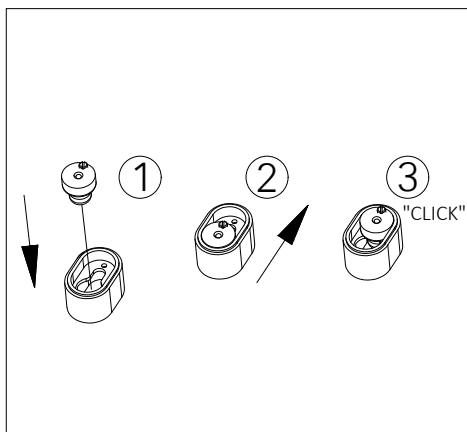

8. Range of displacement ~15mm

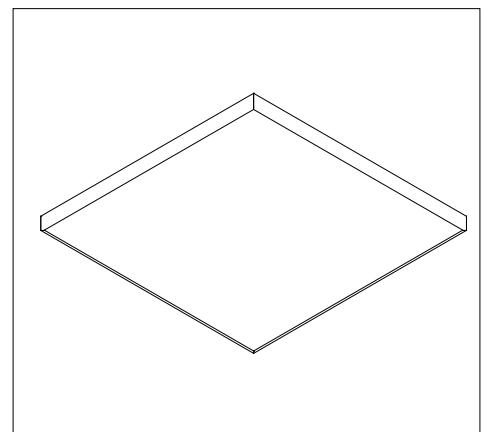


9.


## CUBIC NEO A9 | SURFACE

Q500 - Q800


### 1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

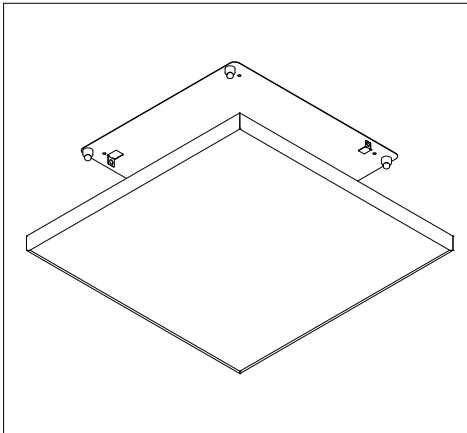


1. Bei allen Montagearbeiten Handschuhe tragen.  
 Use gloves when handling the fixture.

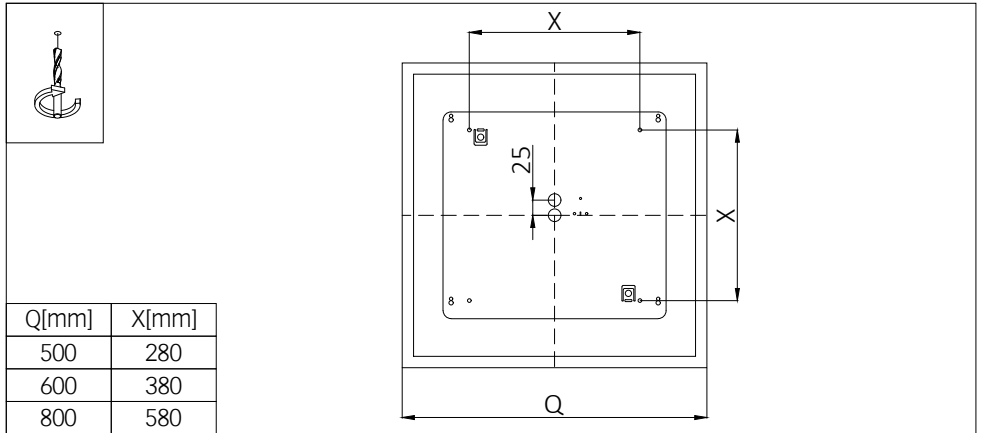


2. Montageöffnungen.  
 Installation openings.

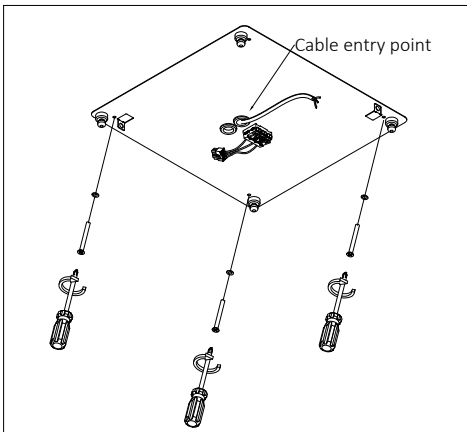


3. - min/max stripped wire length: 7mm-10mm  
 - max power supply cable: 1,5mm<sup>2</sup>

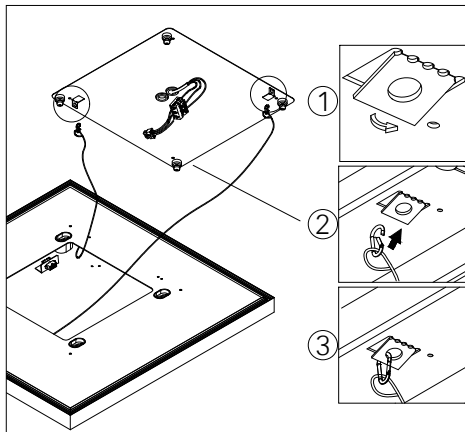


5.

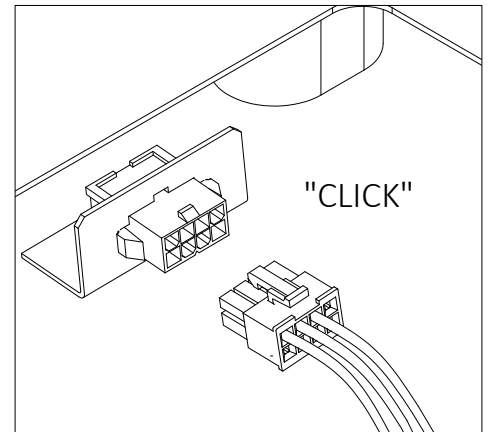


6.

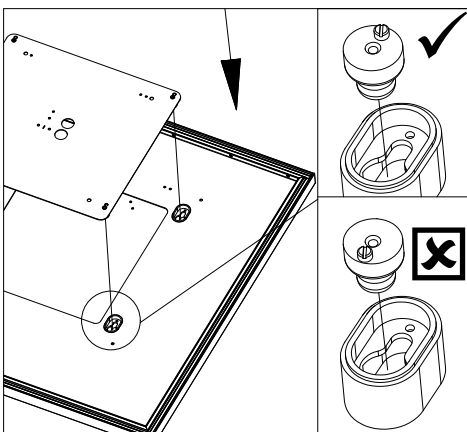

7.

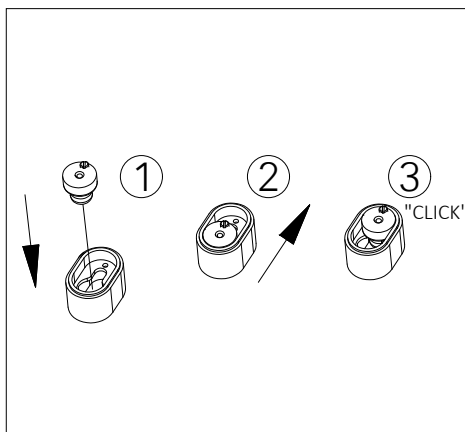

8. Range of displacement - 15mm

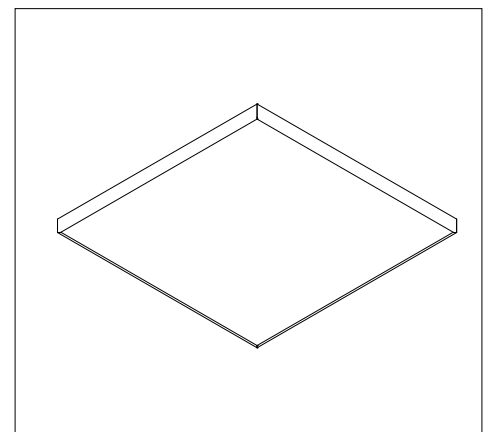

9.