


# PLL 27.500.30.2/DALI


PL 27 (1xLED 39W 830/3000K 2450lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

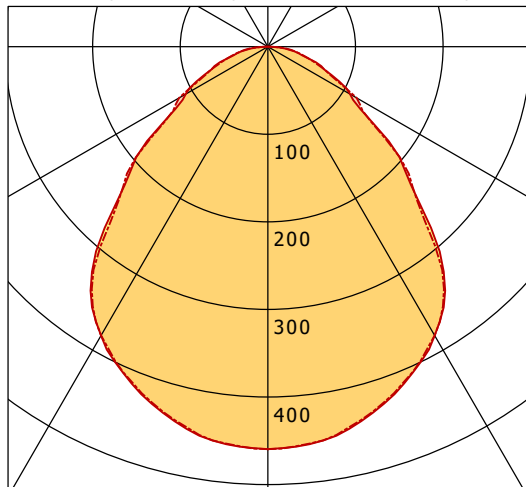

	C0	C90	C180	C270
0°	460	460	460	460
15°	438	437	438	437
30°	381	381	381	381
45°	238	237	238	237
60°	108	117	108	117
75°	43	45	43	45
90°	1	1	1	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

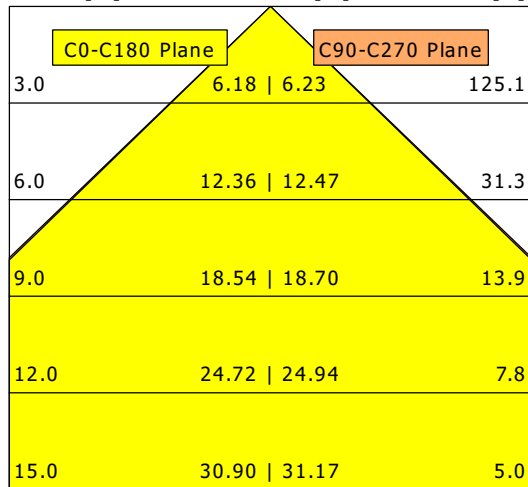

<b>η</b>	LED
Efficiency	63 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	39 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.3
UGR C90/C270	19.4
CIE Flux Codes	60 87 97 100 100
Ra/CRI	>80