


SKIM-P 303.840.1/DALI

Skive Medium | Pendel (1xLED 39W 840/4000K 3960lm)

— C0/C180 cd / 1000 lm - - - C90/C270

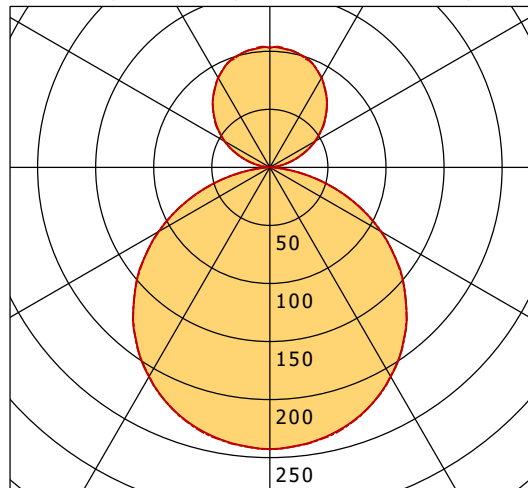

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 243 | 243 | 243 | 243 |
| 30° | 208 | 208 | 208 | 208 |
| 60° | 111 | 111 | 111 | 111 |
| 90° | 1 | 1 | 1 | 1 |
| 120° | 45 | 45 | 45 | 45 |
| 150° | 89 | 89 | 89 | 89 |
| 180° | 103 | 103 | 103 | 103 |
| cd / 1000 lm | | | | |

LDC unsuitable for cone representation.
The C0 angle is oversized.

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 102 lm/W |
| Direct/Indirect | ↓ 71% / ↑ 29% |
| System Power | 39 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 23.3 |
| UGR C90/C270 | 23.3 |
| CIE Flux Codes | 47 79 96 71 100 |
| Ra/CRI | > 80 |