



QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP60

Artikel-Nr. 75222027

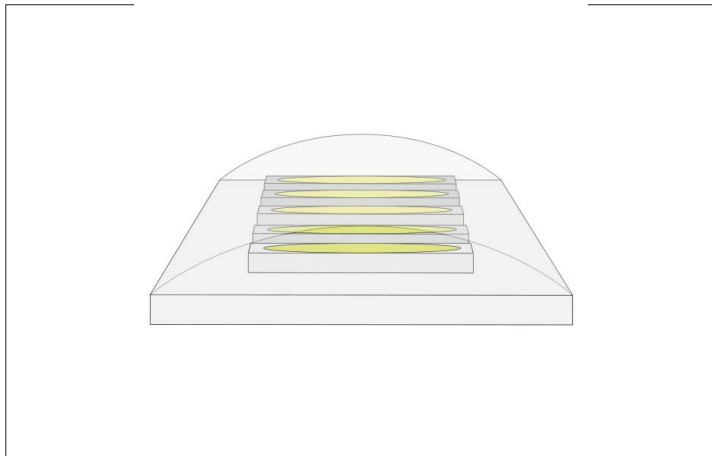

QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP60, white, 2.700K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 50.0 mm Lampenleistung je Meter: 9.6 W/m, Lichtstrom je Meter: 310.0 lm/m, Schutzart raumseitig: IP60, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 8,3mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 50 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

| | |
|--------------------|------------------|
| Artikel-Nr. | 75222027 |
| Stand: | 06.12.2021 11:58 |

| | |
|------------------------------------|---|
| Colour temperature | 2700 K |
| Colour | White |
| Length | 50 mm |
| Beam angle | 120 ° |
| Amount of light sources / fittings | 600 Qty |
| Lamp | LED |
| scope of delivery | Including connecting cable on one side, length 350 mm |

| | |
|----------------------|-----------------------------|
| Control | Dimming depending on driver |
| Voltage | 24V |
| Degree of protection | IP60 |
| Protection class | III |
| Length | 50 mm |
| Width | 8 mm |
| Aufbauhöhe | 2.8 mm |
| Circuit type | Parallel conduction |