


ML-A 045.1040.08 APB/DALI


Monoline 045 | Surface-Mounted & Pendant (1xLED 19W 840/4000K 1880lm)

— C0/C180 cd / 1000 lm - - - C90/C270

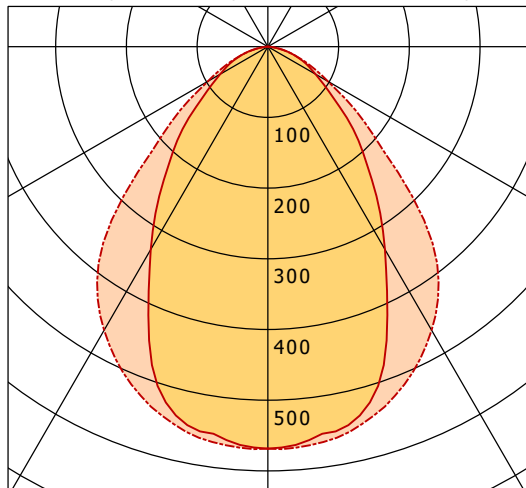

	C0	C90	C180	C270
0°	569	569	569	569
15°	531	547	531	547
30°	331	463	331	463
45°	176	275	176	275
60°	78	98	78	98
75°	31	31	31	31
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

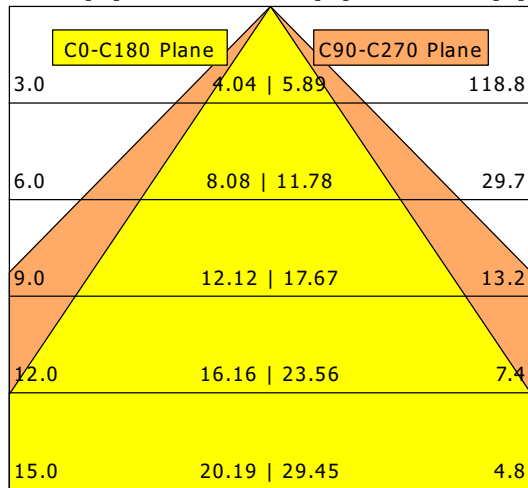

η	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	19 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.9
CIE Flux Codes	65 90 98 100 100
Ra/CRI	>80