



TIMR-PA 201.927.MF

Timba Round | Pendant (1xLED 13W 827/2700K 1730lm)

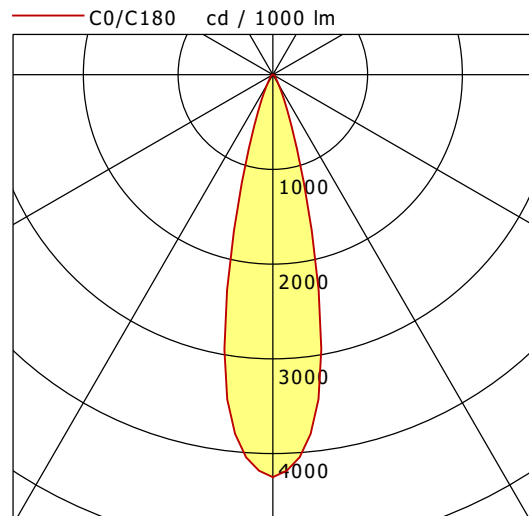

	C0	C90	C180	C270
0°	4249	4249	4249	4249
15°	1427	1427	1427	1427
30°	123	123	123	123
45°	36	36	36	36
60°	20	20	20	20
75°	11	11	11	11
90°	0	0	0	0
cd / 1000 lm				

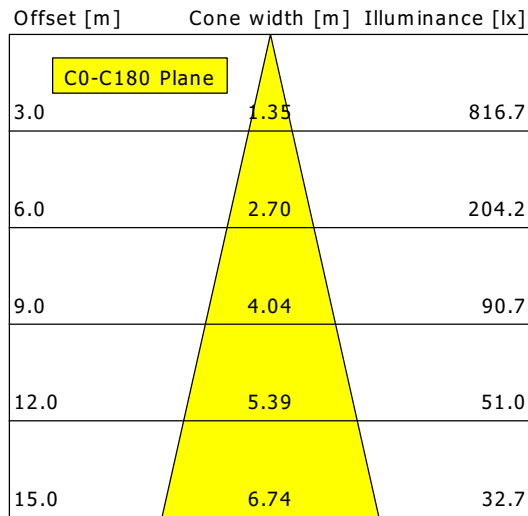

η	LED
Efficiency	133 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.0
UGR C90/C270	21.0
CIE Flux Codes	93 97 99 100 100
Ra/CRI	>80