


ML-A 070.1030.11 AOV/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 18W 830/3000K 1930lm)

— C0/C180 cd / 1000 lm - - - C90/C270

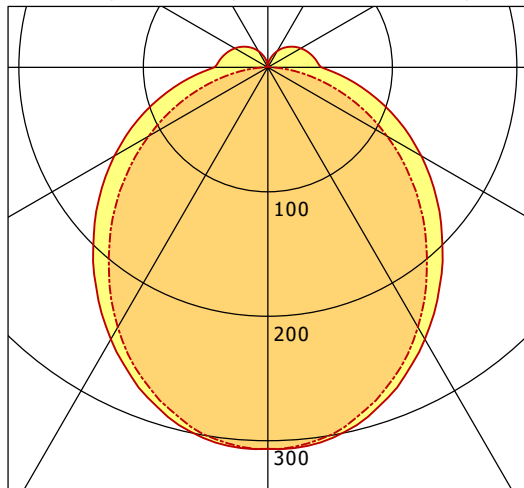

	C0	C90	C180	C270
0°	307	307	307	307
30°	252	241	252	241
60°	142	111	142	111
90°	43	2	43	2
120°	31	1	31	1
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

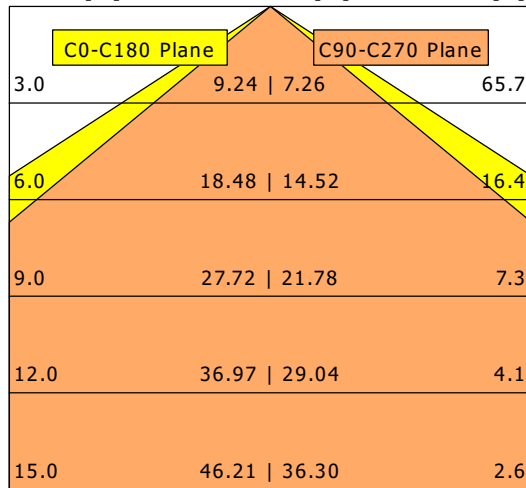

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.2
UGR C90/C270	20.9
CIE Flux Codes	45 74 92 89 100
Ra/CRI	>80