
Recessed ceiling light Dione, 8,5 W, DIM, 3000 K, black





DIONE series recessed ceiling spotlights boast a particularly low installation depth. This makes them highly space-saving and means a ceiling cavity of just 25 mm is sufficient. The connection box included in the scope of delivery and the dimmable power supply also fit snugly in the 68 mm cut-out thanks to the compact design. As all components to operate the Dione are pre-assembled, installation is time-saving and no tools are required. The connection box with push terminals additionally enables 3-pole feed-through wiring. This makes the DIONE recessed spotlight the ideal solution for retrofit installation in renovated properties or for new installations where installation space is in short supply.

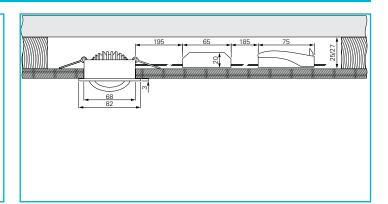

Special features

- Flat installation depth (25 mm) ٠
- Including dimmable power supply and connection box .
- Feed-through wiring possible .
- Time-saving installation
- . Spotlight can be swivelled by 30°

Housing Material	Aluminium	Required Installation Depth	25 mm
Housing Color	Black	Mounting Surface Thickness	9-13 mm
Material of Lens	Plastic	Cut Out Diameter	68 mm
Colour of Lens	White	Product weight	163 g
Protection Class	Protection class II/protective insulation	Working Temperature Storage Temperature	-20 to 40 °C -20 to 40 °C
Rated Input	8.5 W	IP Protection Class	IP 20
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes	Life Time L70 / B50	50000 h
Connection Type	Clamp	Switching Cycles	25000
Primary Connection	Connection box IP20	Power Consumption	9 kWh/1000h
Number of Cable Entries	2	Energy Efficiency Class	E
Dimmable	Yes		
Control technology	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	5 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	800 lm		
Luminous Efficiency	94.1 lm/W		
Rated Angle of Reflection	36 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	30 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	41 mm		
Diameter	82 mm		
Installation Depth	38 mm		

Deko-Light Elektronik-Vertriebs GmbH Auf der Hub 2 | D-76307 Karlsbad www.deko-light.com deko@deko-light.com