


LUZ-P12 103.840.60/DALI-ST


LUZ | Pendant (1xLED 23W 840/4000K 3380lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

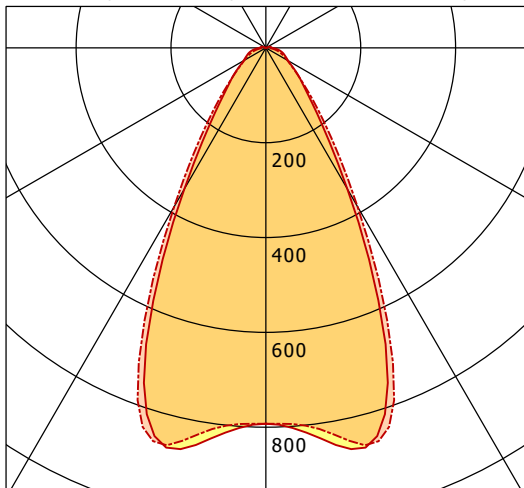

	C0	C90	C180	C270
0°	793	793	793	793
15°	863	866	863	866
30°	344	386	344	386
45°	112	119	112	119
60°	54	52	54	52
75°	36	27	36	27
90°	14	2	14	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

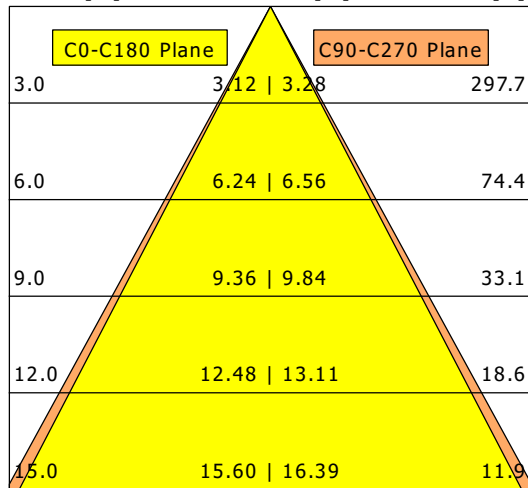

η	LED
Efficiency	147 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	23 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.4
CIE Flux Codes	76 90 96 98 100
Ra/CRI	>80