


ML-A 070.1130.14 AOB/DALI

Monoline 070 Surface-Mounted & Pendant (1xLED 55W 830/3000K 5250lm)

— C0/C180 cd / 1000 lm - - - C90/C270

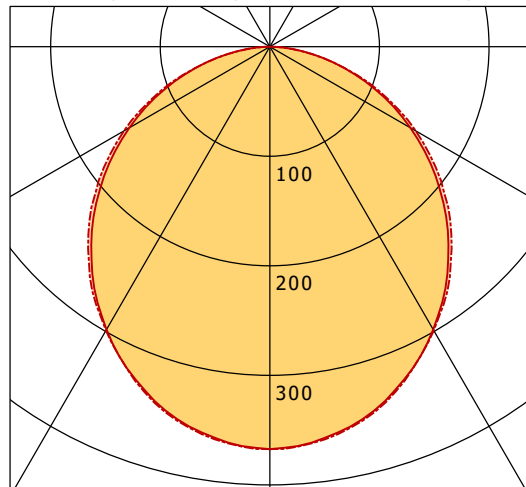

	C0	C90	C180	C270
0°	367	367	367	367
15°	348	349	348	349
30°	298	299	298	299
45°	229	234	229	234
60°	148	154	148	154
75°	65	65	65	65
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.12	8.45	214.3
6.0	16.25	16.89	53.6
9.0	24.37	25.34	23.8
12.0	32.49	33.78	13.4
15.0	40.61	42.23	8.6

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	55 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.6
UGR C90/C270	26.6
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80