


FLCK-P 415.150.40


FLC Pendant (1xLED 106W 840/4000K 14850lm 66 °)

— C0/C180 cd / 1000 lm - - - C90/C270

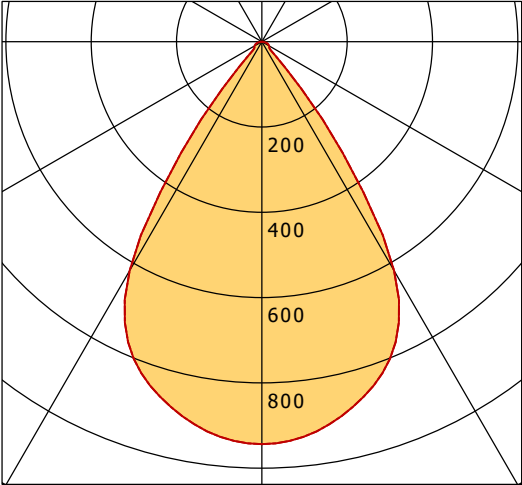

	C0	C90	C180	C270
0°	944	944	944	944
15°	874	874	874	874
30°	620	620	620	620
45°	36	36	36	36
60°	20	20	20	20
75°	11	11	11	11
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

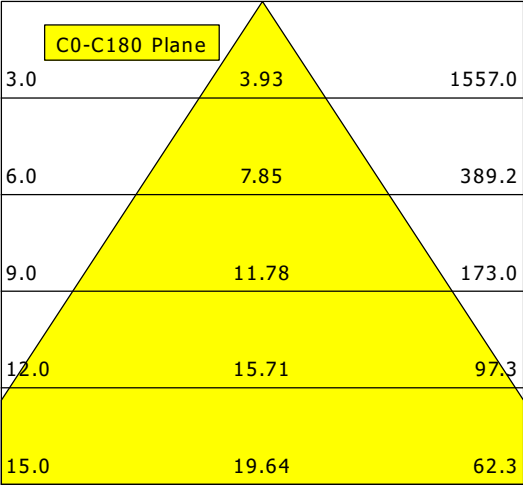

η		LED
Efficiency		140 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		106 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.1
UGR C90/C270		22.1
CIE Flux Codes		92 97 99 100 100
Ra/CRI		> 80