


PLL 25.675.40.2/DALI

PL 25 (1xLED 75W 840/4000K 5790lm)

— C0/C180 cd / 1000 lm - - - C90/C270

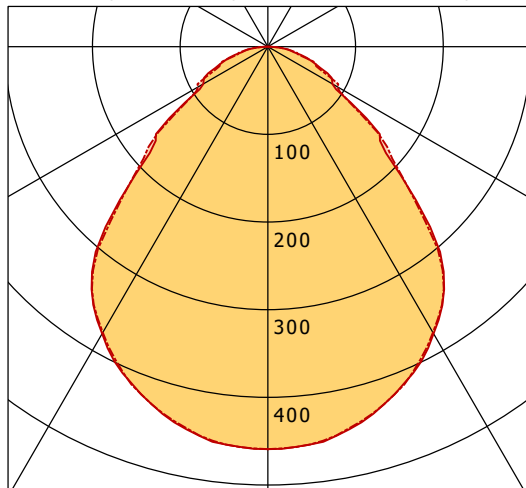

	C0	C90	C180	C270
0°	459	459	459	459
15°	439	438	439	438
30°	378	376	378	376
45°	226	225	226	225
60°	85	92	85	92
75°	43	37	43	37
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	5.96 5.94		295.3
6.0	11.92 11.87		73.8
9.0	17.87 17.81		32.8
12.0	23.83 23.74		18.5
15.0	29.79 29.68		11.8

η	LED
Efficiency	77 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	75 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	60 86 97 100 100
Ra/CRI	>80