


CSALP 40.2040.35/DALI

CSA 40 (1xLED 27W 840/4000K 2850lm 35 °)

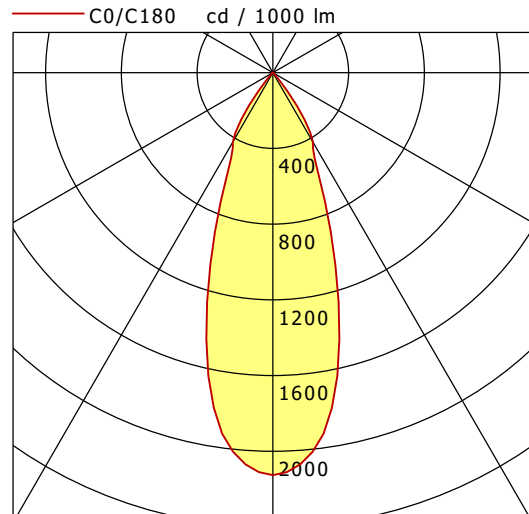

| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 2126 | 2126 | 2126 | 2126 |
| 15° | 1356 | 1356 | 1356 | 1356 |
| 30° | 423 | 423 | 423 | 423 |
| 45° | 13 | 13 | 13 | 13 |
| 60° | 4 | 4 | 4 | 4 |
| 75° | 3 | 3 | 3 | 3 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

| Offset [m] | Cone width [m] | Illuminance [lx] |
|----------------------|----------------|------------------|
| C0-C180 Plane | | |
| 3.0 | 1.96 | 673.2 |
| 6.0 | 3.92 | 168.3 |
| 9.0 | 5.88 | 74.8 |
| 12.0 | 7.84 | 42.1 |
| 15.0 | 9.80 | 26.9 |

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 106 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 27 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 20.3 |
| UGR C90/C270 | 20.3 |
| CIE Flux Codes | 98 99 100 100 100 |
| Ra/CRI | >80 |