


FLIQ 100.1030.01/DALI


Flix 100 Square (FLIQZ 100.05, 1xLED 15W 830/3000K 1160lm 65 °)

— C0/C180 cd / 1000 lm - - - - C90/C270

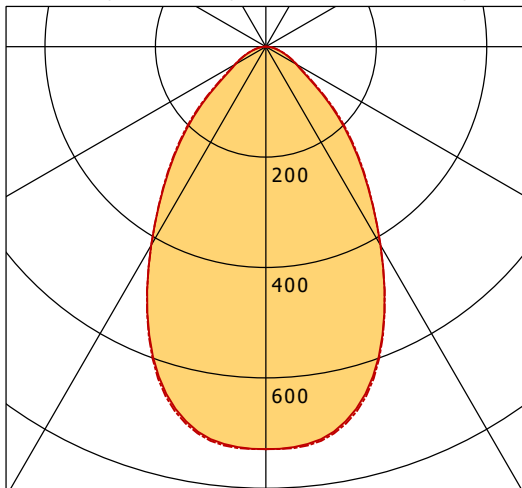

	C0	C90	C180	C270
0°	729	729	729	729
15°	666	670	666	670
30°	415	415	415	415
45°	193	199	193	199
60°	64	65	64	65
75°	23	24	23	24
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

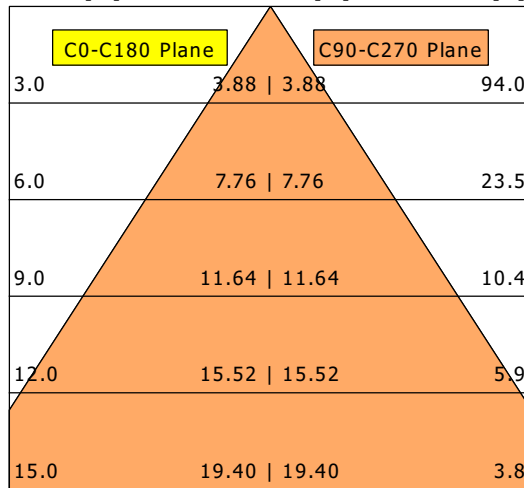

η	LED
Efficiency	77 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	29.6
UGR C90/C270	29.8
CIE Flux Codes	73 93 99 100 100
Ra/CRI	> 80