


ORYO-R 201.927.L06/DALI

Oryo 200 | Recessed (1xLED 20W 927/2700K 510lm)

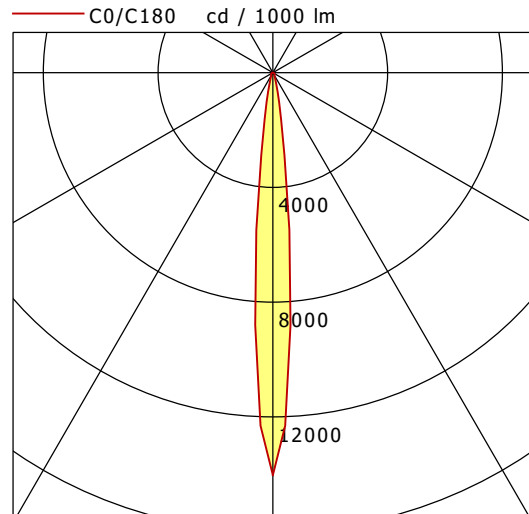

| | C0 | C90 | C180 | C270 |
|--------------|-------|-------|-------|-------|
| 0° | 14031 | 14031 | 14031 | 14031 |
| 15° | 557 | 557 | 557 | 557 |
| 30° | 111 | 111 | 111 | 111 |
| 45° | 87 | 87 | 87 | 87 |
| 60° | 59 | 59 | 59 | 59 |
| 75° | 19 | 19 | 19 | 19 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

| Offset [m] | Cone width [m] | Illuminance [lx] |
|----------------------|----------------|------------------|
| C0-C180 Plane | | |
| 3.0 | 0.53 | 795.1 |
| 6.0 | 1.06 | 198.8 |
| 9.0 | 1.59 | 88.3 |
| 12.0 | 2.12 | 49.7 |
| 15.0 | 2.65 | 31.8 |

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 26 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 20 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.0 |
| UGR C90/C270 | 22.0 |
| CIE Flux Codes | 81 93 99 100 100 |
| Ra/CRI | >90 |