


ML-A 070.0730.08 AOV


Monoline 070 Surface-Mounted & Pendant (1xLED 9W 830/3000K 980lm)

— C0/C180 cd / 1000 lm - - - C90/C270

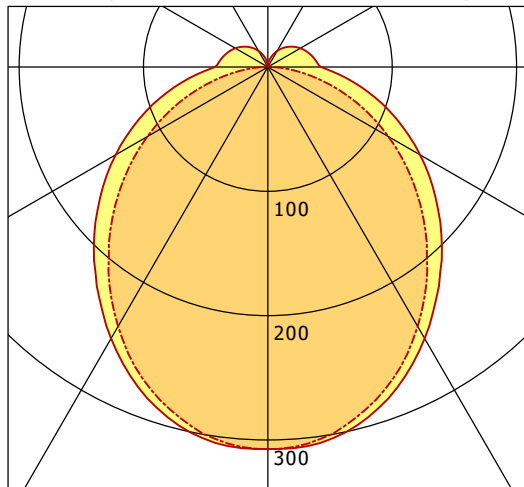

	C0	C90	C180	C270
0°	307	307	307	307
30°	252	241	252	241
60°	141	112	141	112
90°	43	3	43	3
120°	30	2	30	2
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

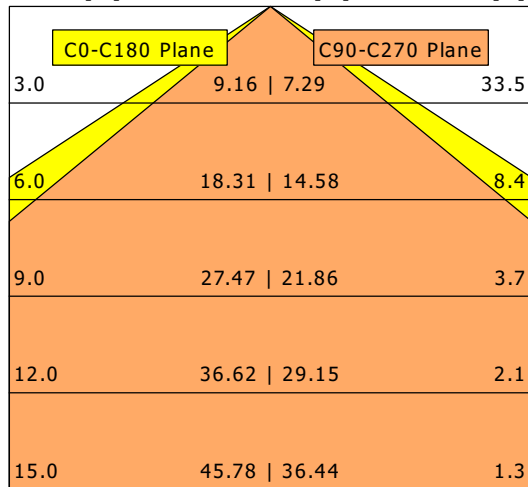

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	9 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.8
UGR C90/C270	19.5
CIE Flux Codes	45 74 92 89 100
Ra/CRI	> 80