


# ML-A 070.1130.08 AOV/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 33W 830/3000K 3460lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

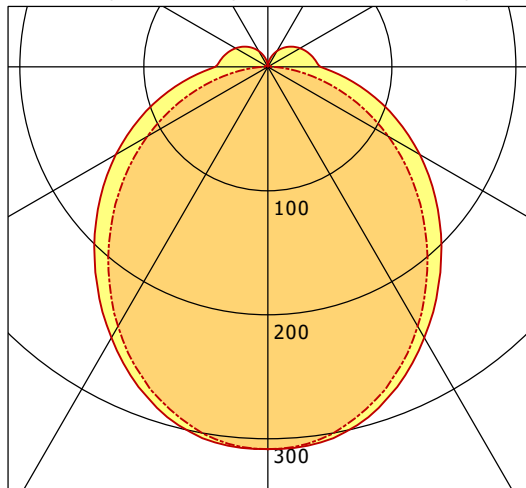

	C0	C90	C180	C270
0°	308	308	308	308
30°	252	242	252	242
60°	142	112	142	112
90°	42	3	42	3
120°	30	2	30	2
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

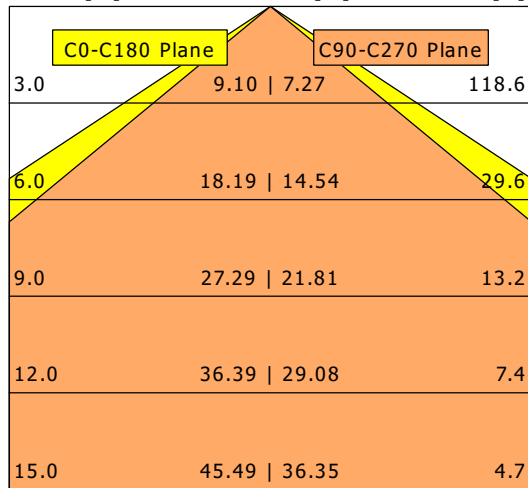

<b>η</b>	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	33 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.1
UGR C90/C270	23.9
CIE Flux Codes	45 74 92 89 100
Ra/CRI	>80