


# PLL 57.925.40.2/DALI


PL 57 (1xLED 112W 840/4000K 8930lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

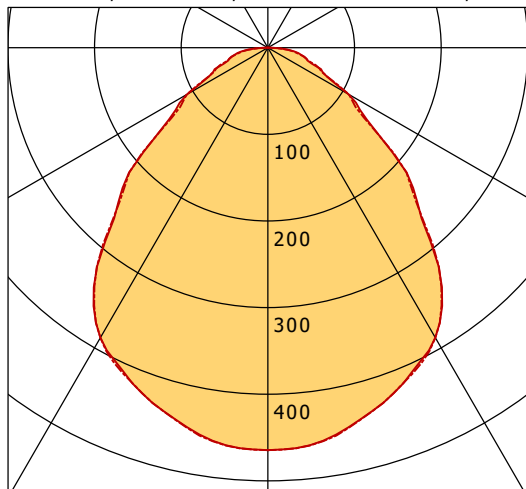

	C0	C90	C180	C270
0°	465	465	465	465
15°	439	439	439	439
30°	387	387	387	387
45°	241	237	241	237
60°	108	108	108	108
75°	45	44	45	44
90°	2	2	2	2
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

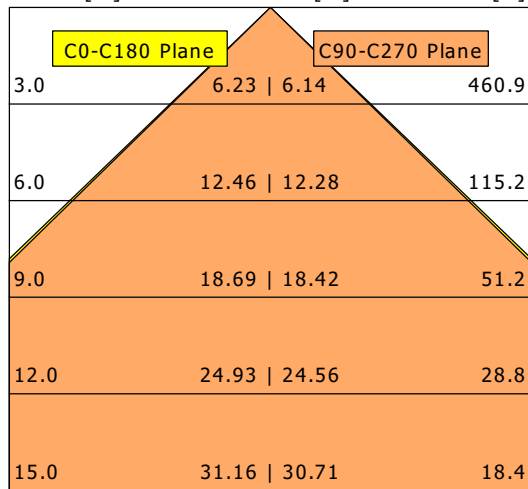

<b>η</b>	LED
Efficiency	80 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	112 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	18.7
CIE Flux Codes	60 86 97 100 100
Ra/CRI	>80