


# MILA-P 104.1500.840/ORGR


Mila | Pendant (1xLED 27W 840/4000K 3570lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

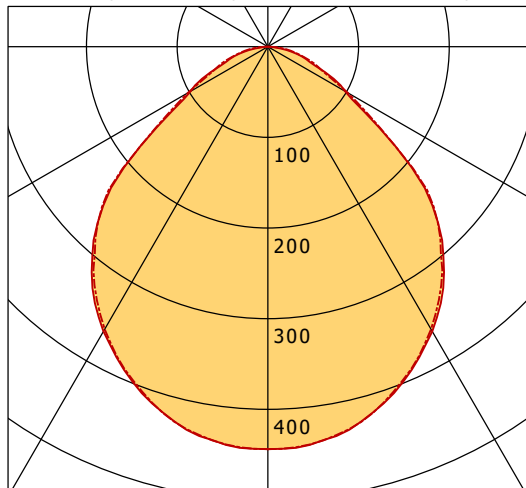

	C0	C90	C180	C270
0°	444	444	444	444
15°	423	423	423	423
30°	363	360	363	360
45°	261	262	261	262
60°	98	102	98	102
75°	36	38	36	38
90°	0	1	0	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

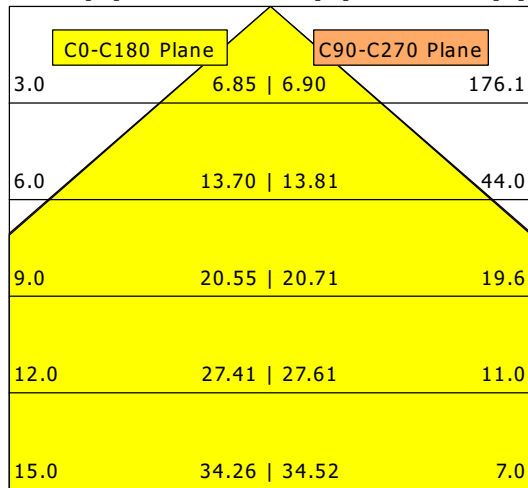

<b>η</b>	LED
Efficiency	132 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	19.4
CIE Flux Codes	58 88 97 100 100
Ra/CRI	>80