

Han 10B-HSM2-LC-DL-M25

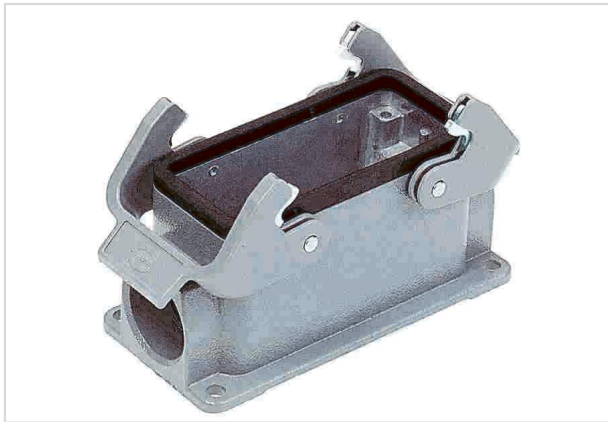


Image is for illustration purposes only. Please refer to product description.

Part number	19 30 010 1271
Specification	Han 10B-HSM2-LC-DL-M25
HARTING eCatalogue	https://b2b.harting.com/19300101271

Identification

Category	Hoods/Housings
Series of hoods/housings	Han [®] B
Type of hood/housing	Surface mounted housing
Type	Low construction

Version

Size	10 B
Version	Side entry
Cable entry	2x M25
Locking type	Double locking lever
Han-Easy Lock [®]	Yes
Field of application	Standard hoods/housings for industrial connectors

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Type rating acc. to UL 50 / UL 50E	4 4X 12

Material properties

Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)



Pushing Performance
Since 1945

Material properties

Material (seal)	NBR
Material (locking)	Polycarbonate (PC) Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0

Specifications and approvals

Approvals	DNV GL
CE	Yes

Commercial data

Packaging size	1
Net weight	215.7 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140163539
eCl@ss	27440202 Shell for industrial connectors